

LEZORA
empire of tiles

Rustic
S E R I E S


STORIES INTO
EVERY SURFACE.


600x600 mm



CASTEL CARRARA


Phase 3

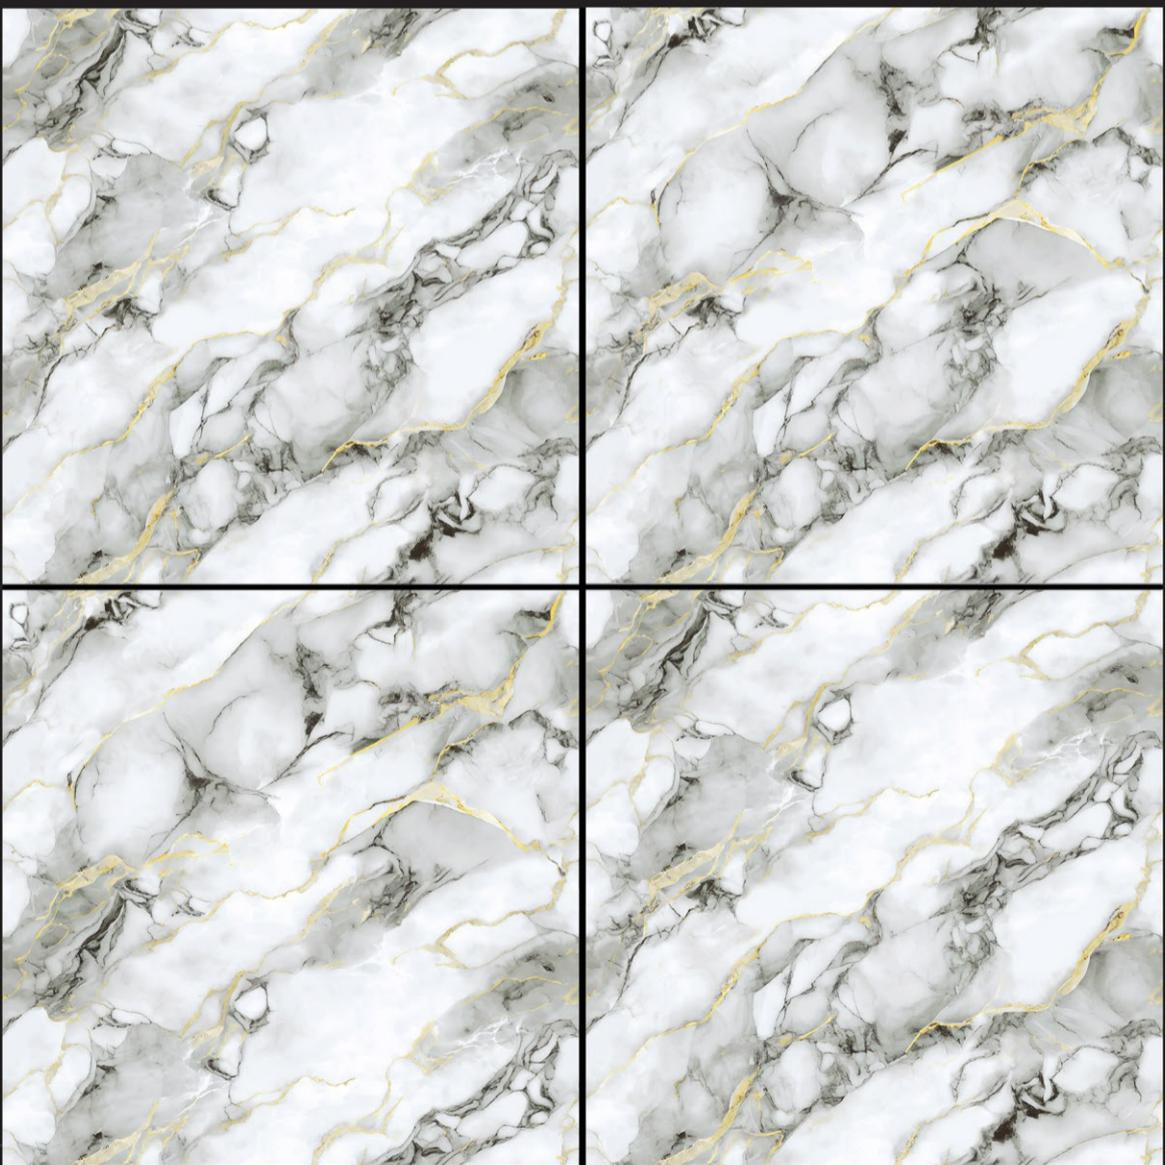


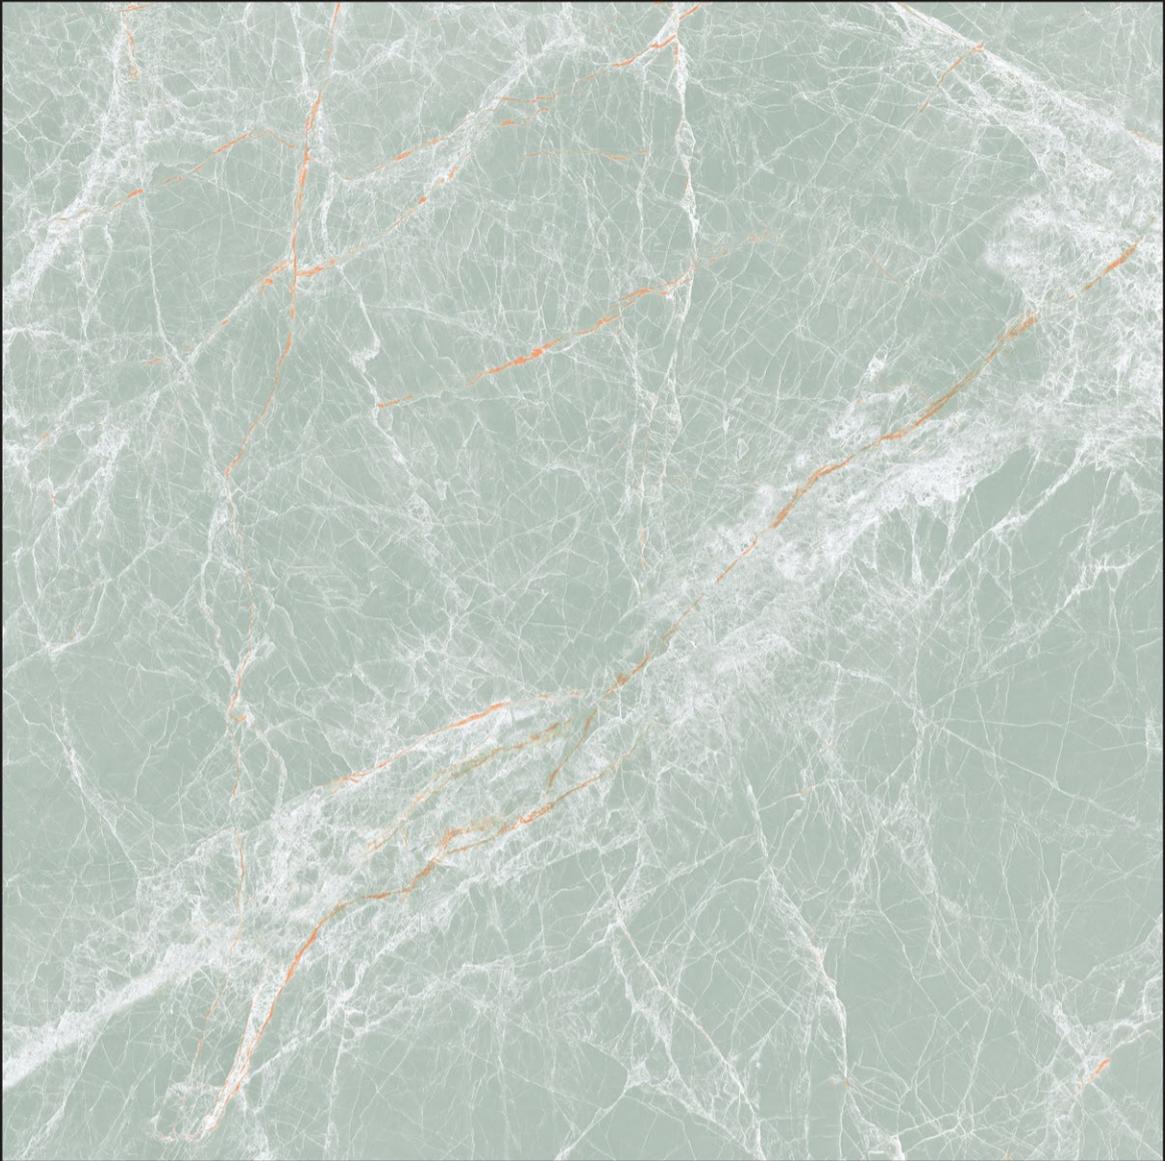

REGIL GREEN


Phase 6

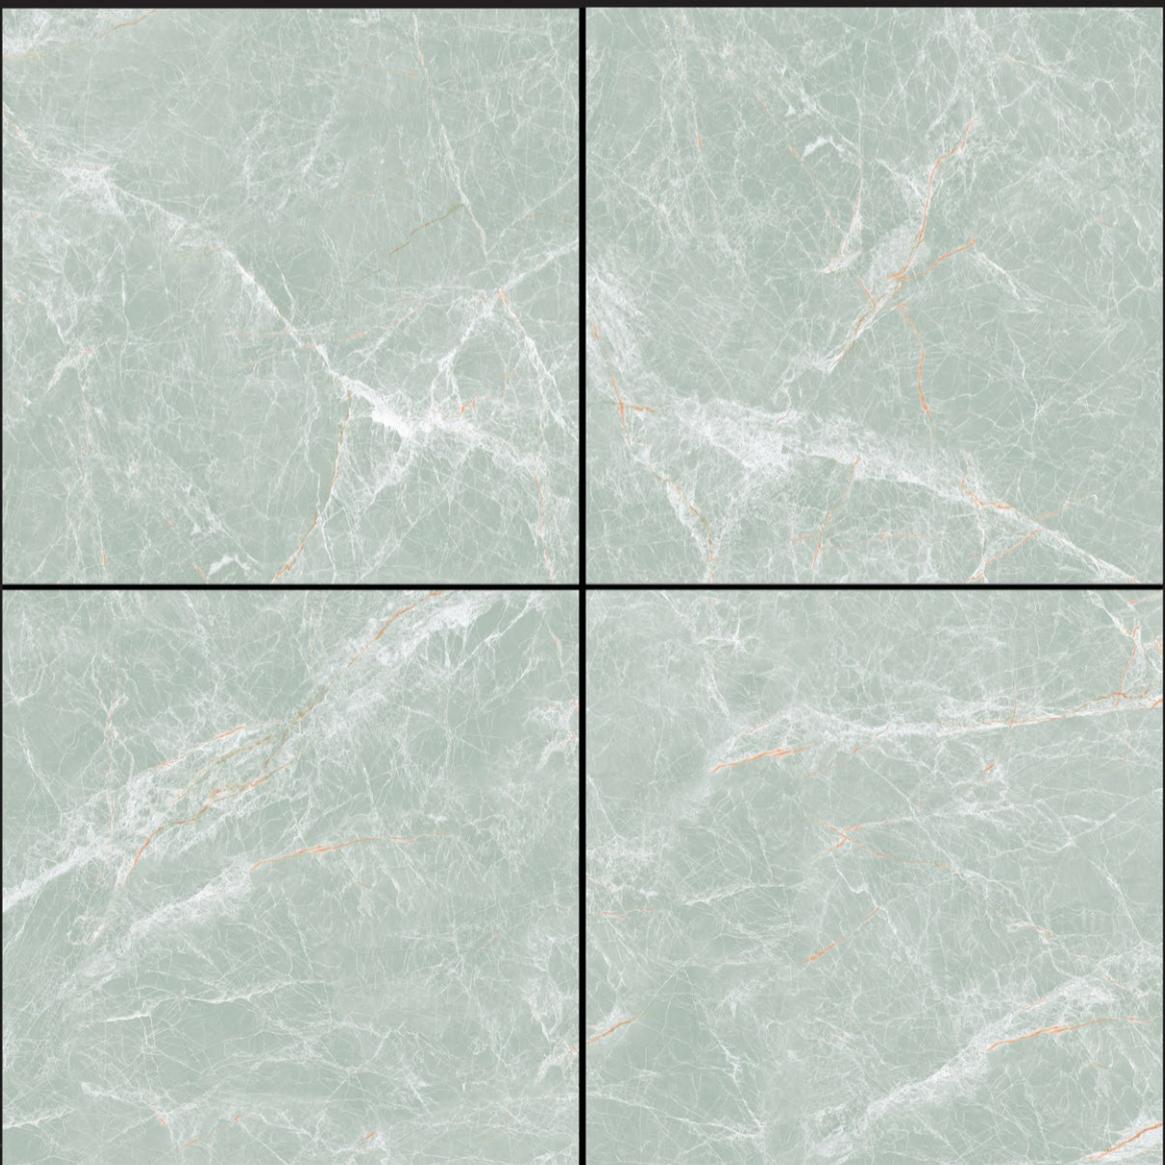

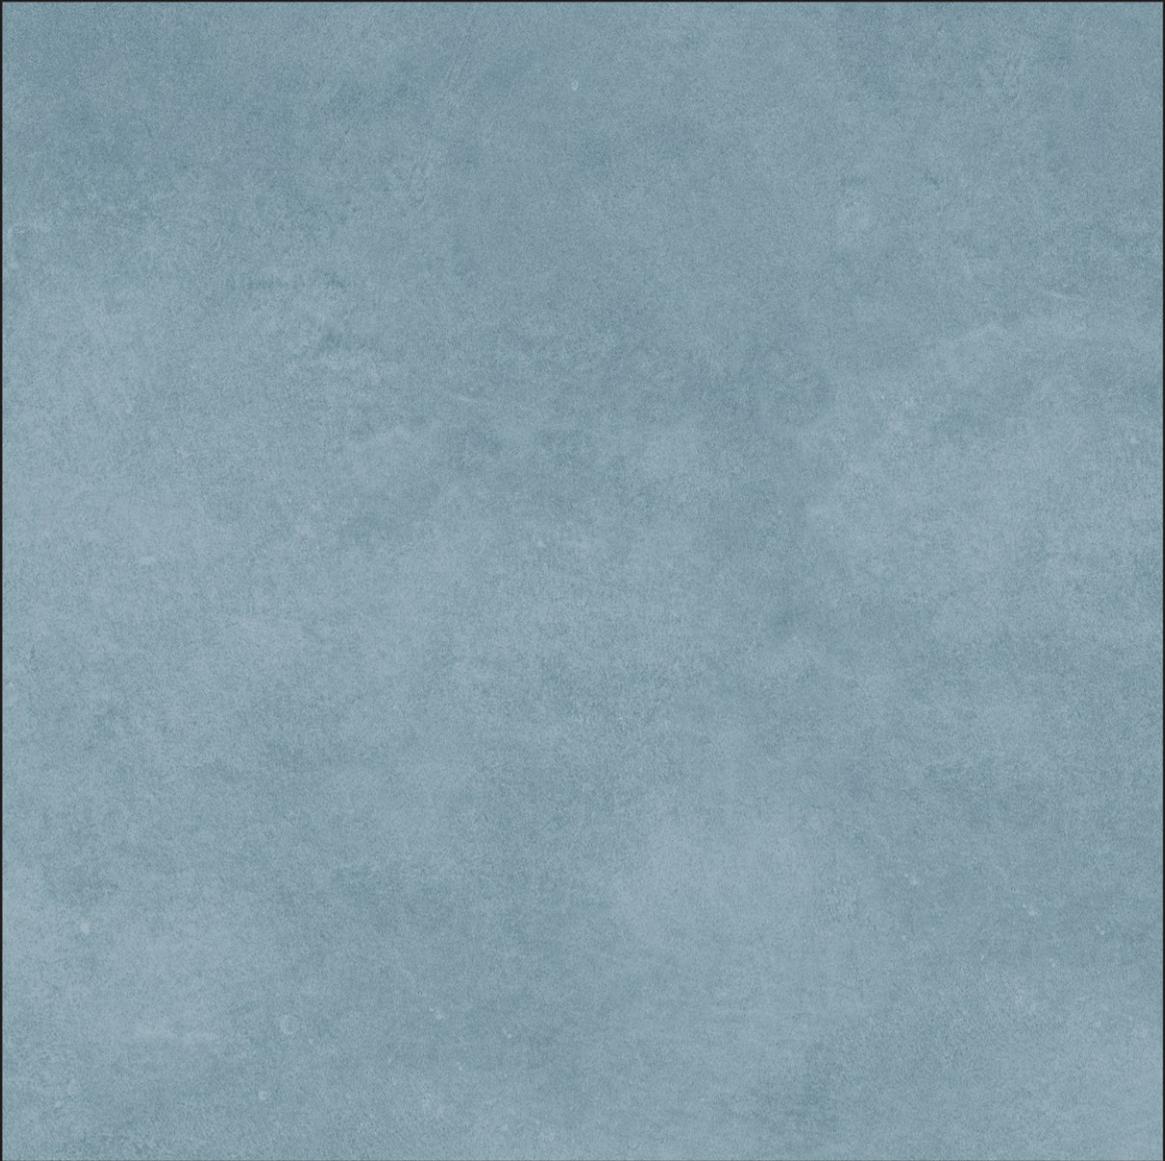

ORVIETO AQUA


Phase 8

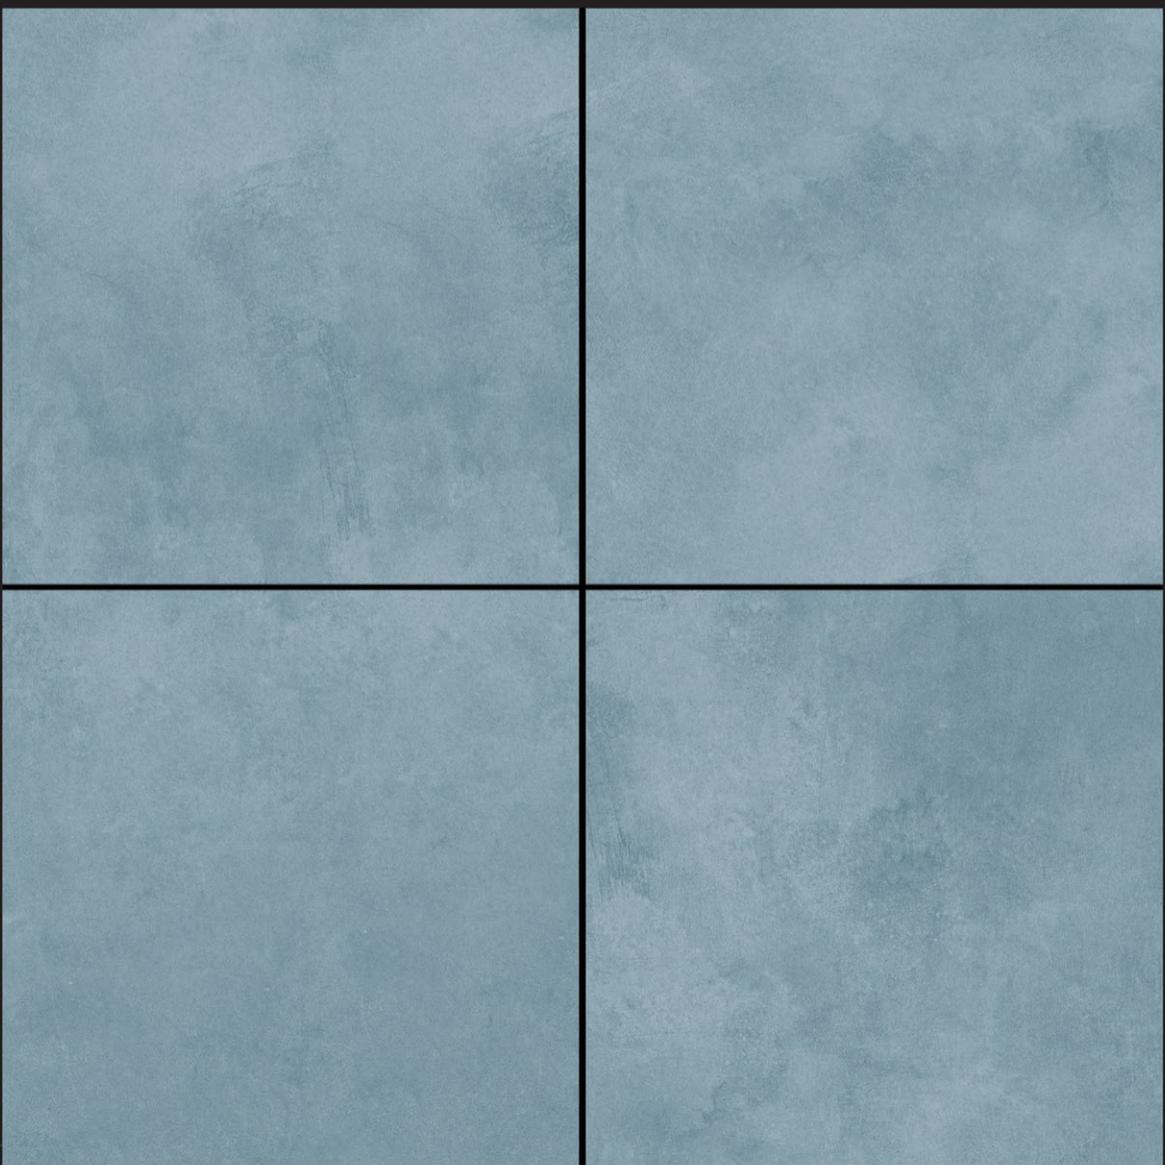




ORVIETO GREEN


Phase 8

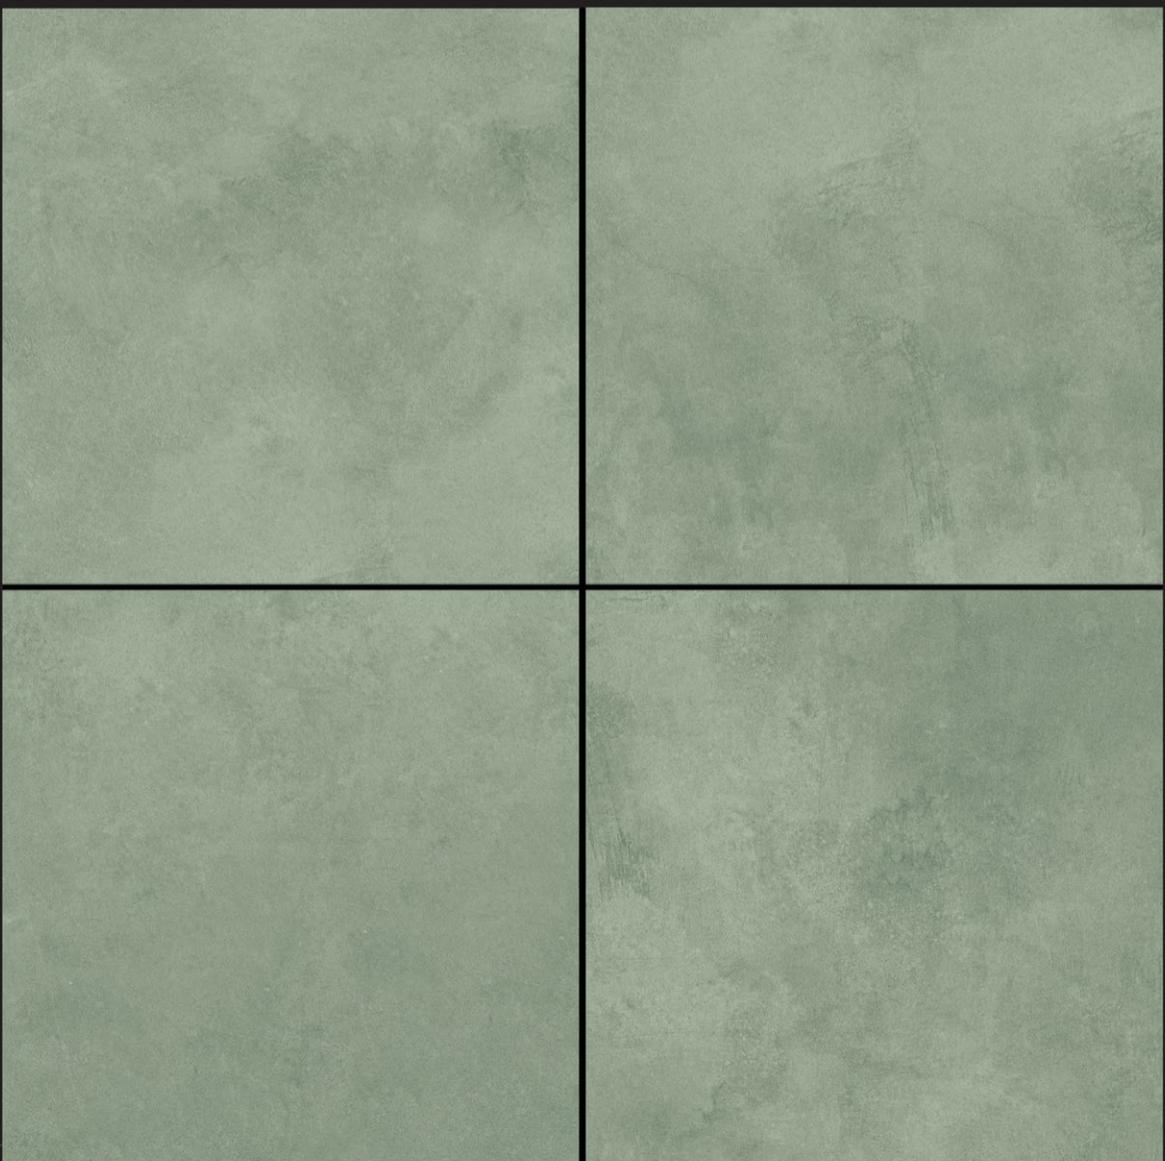

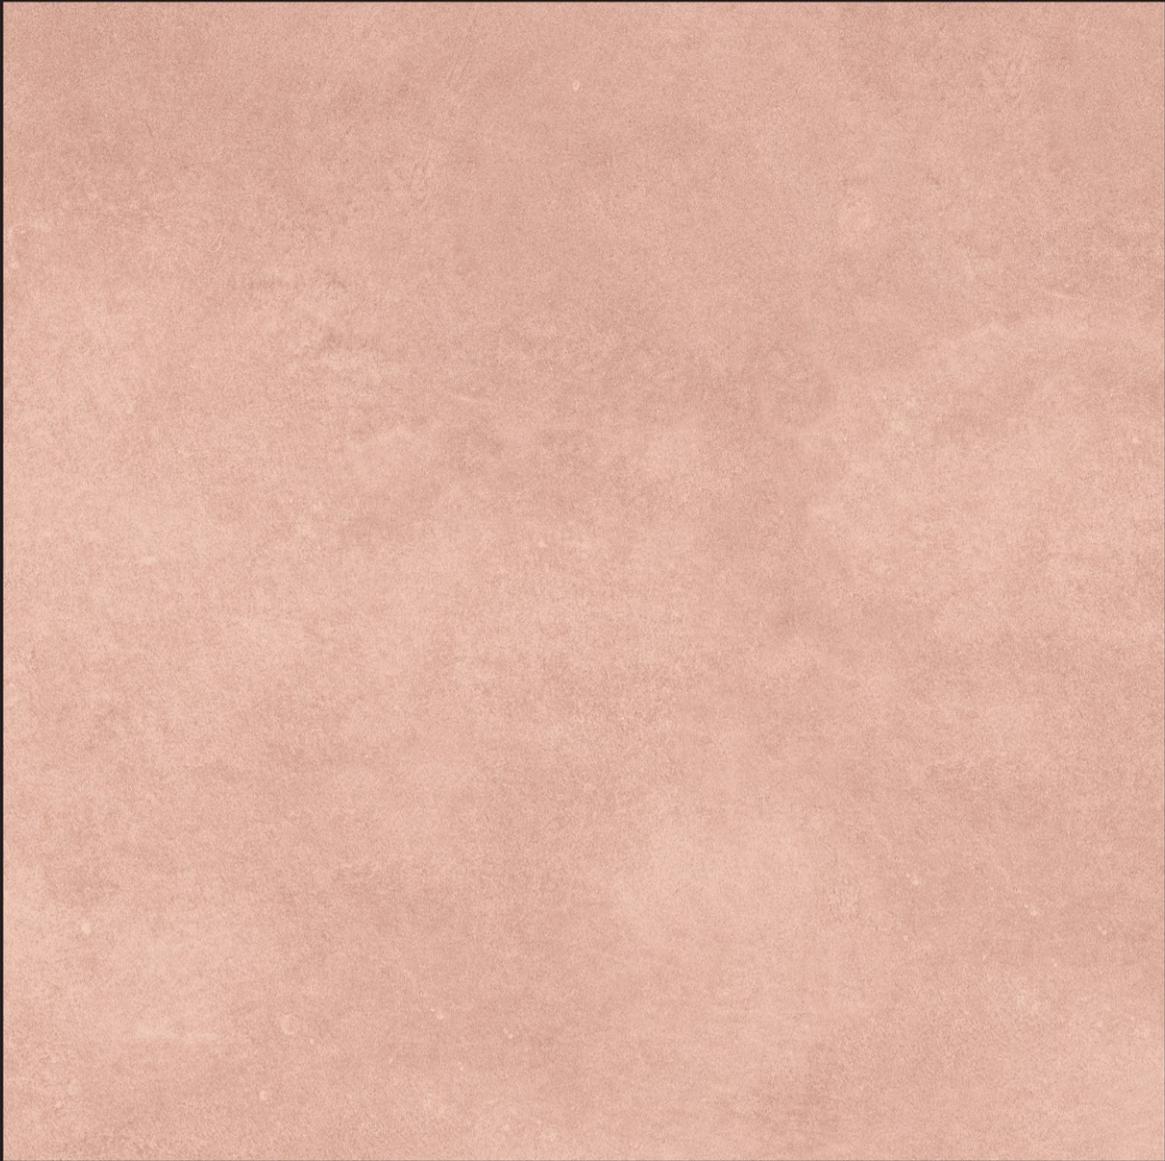

ORVIETO RED

Phase 8

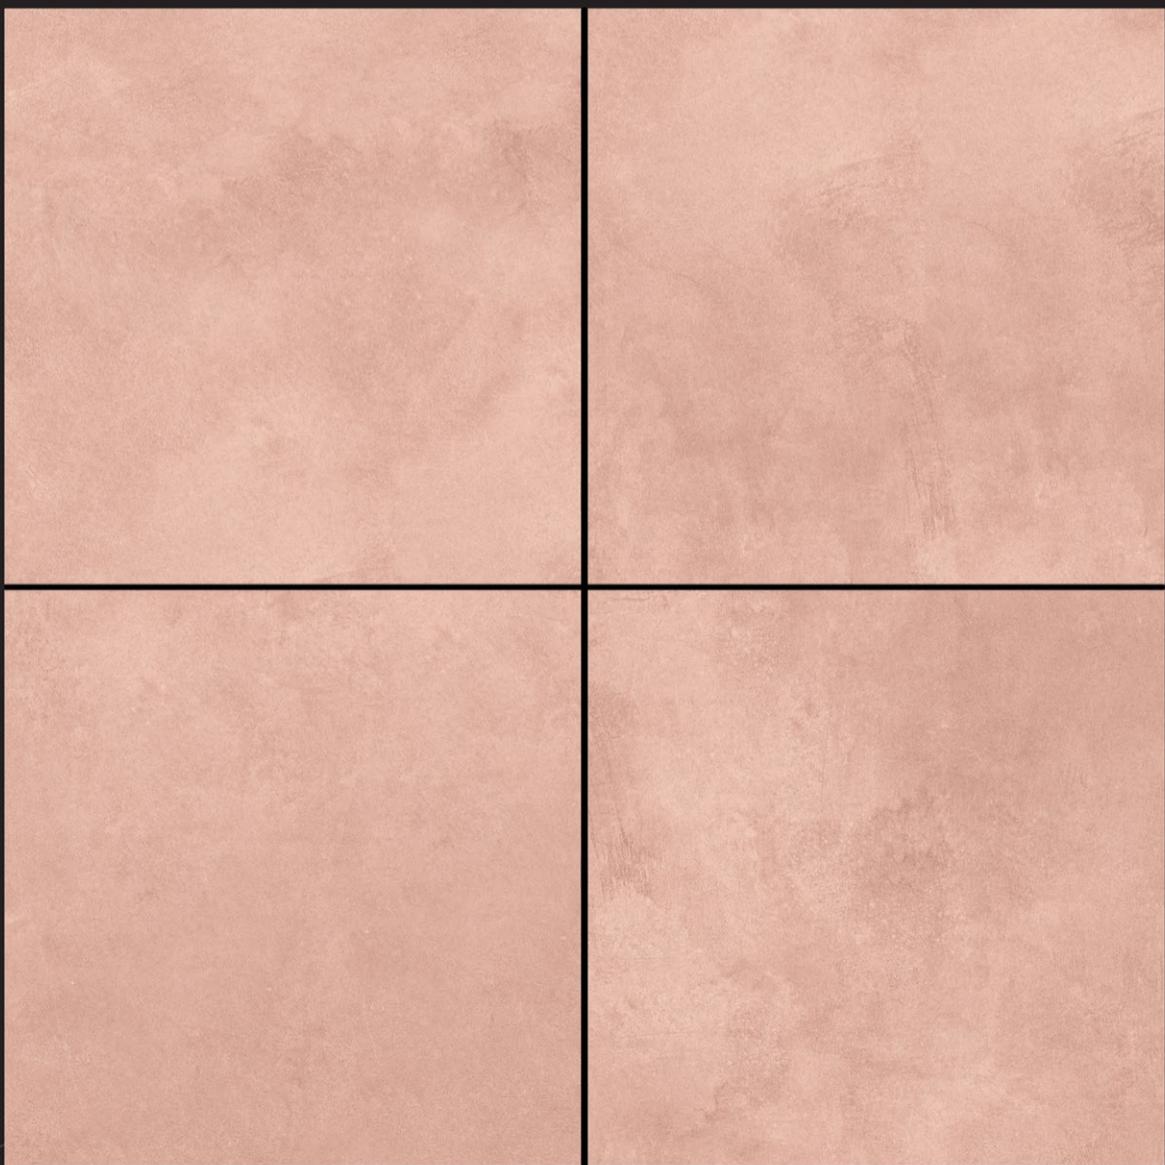




ORVIETO CHOCO


Phase 8




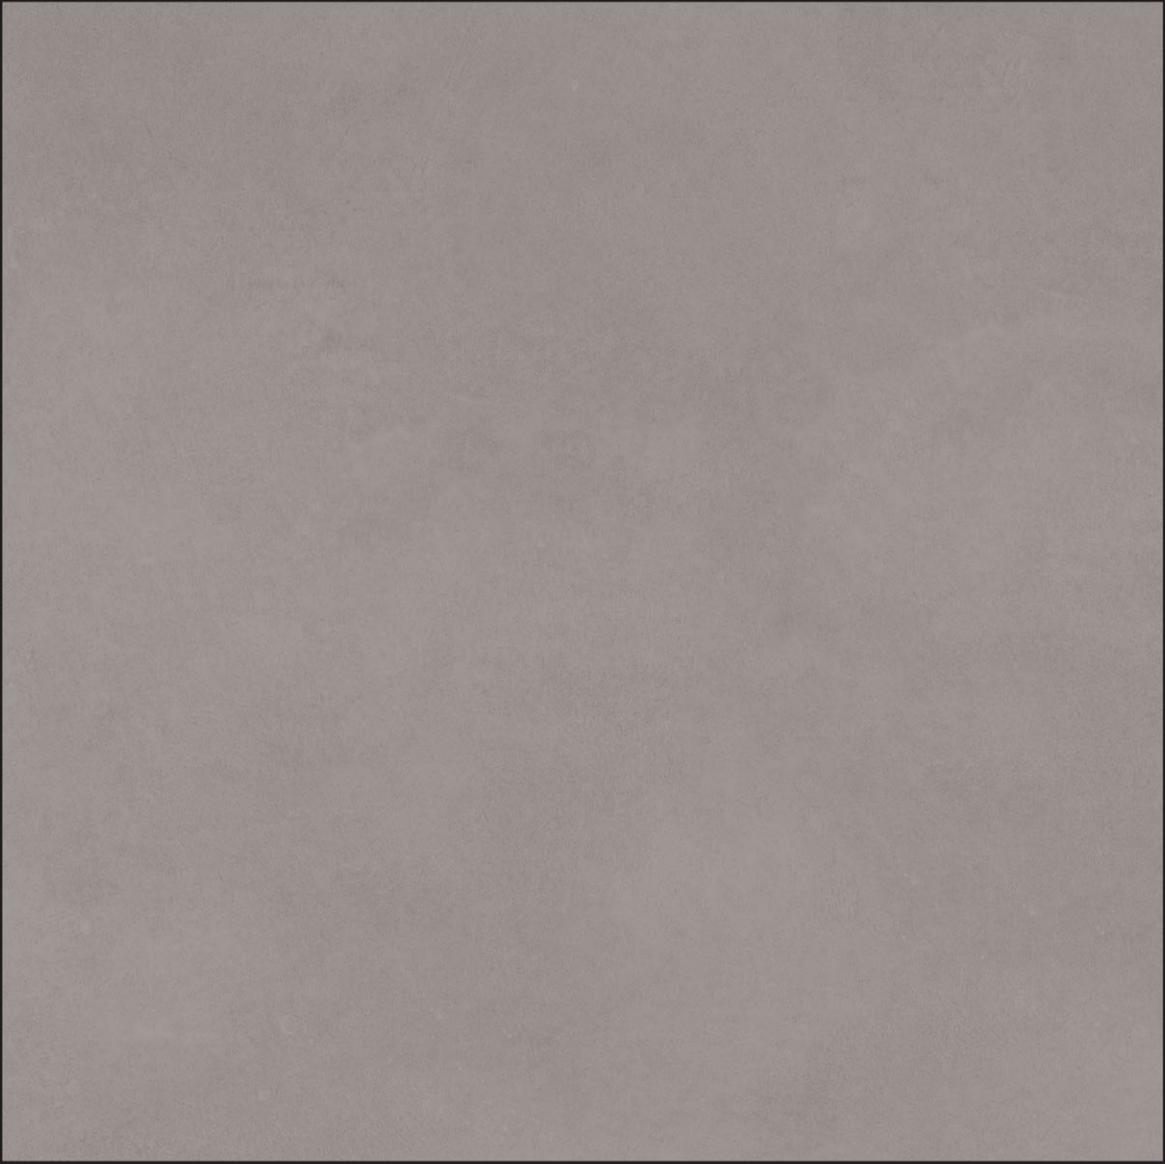

ORVIETO GREY


Phase 8

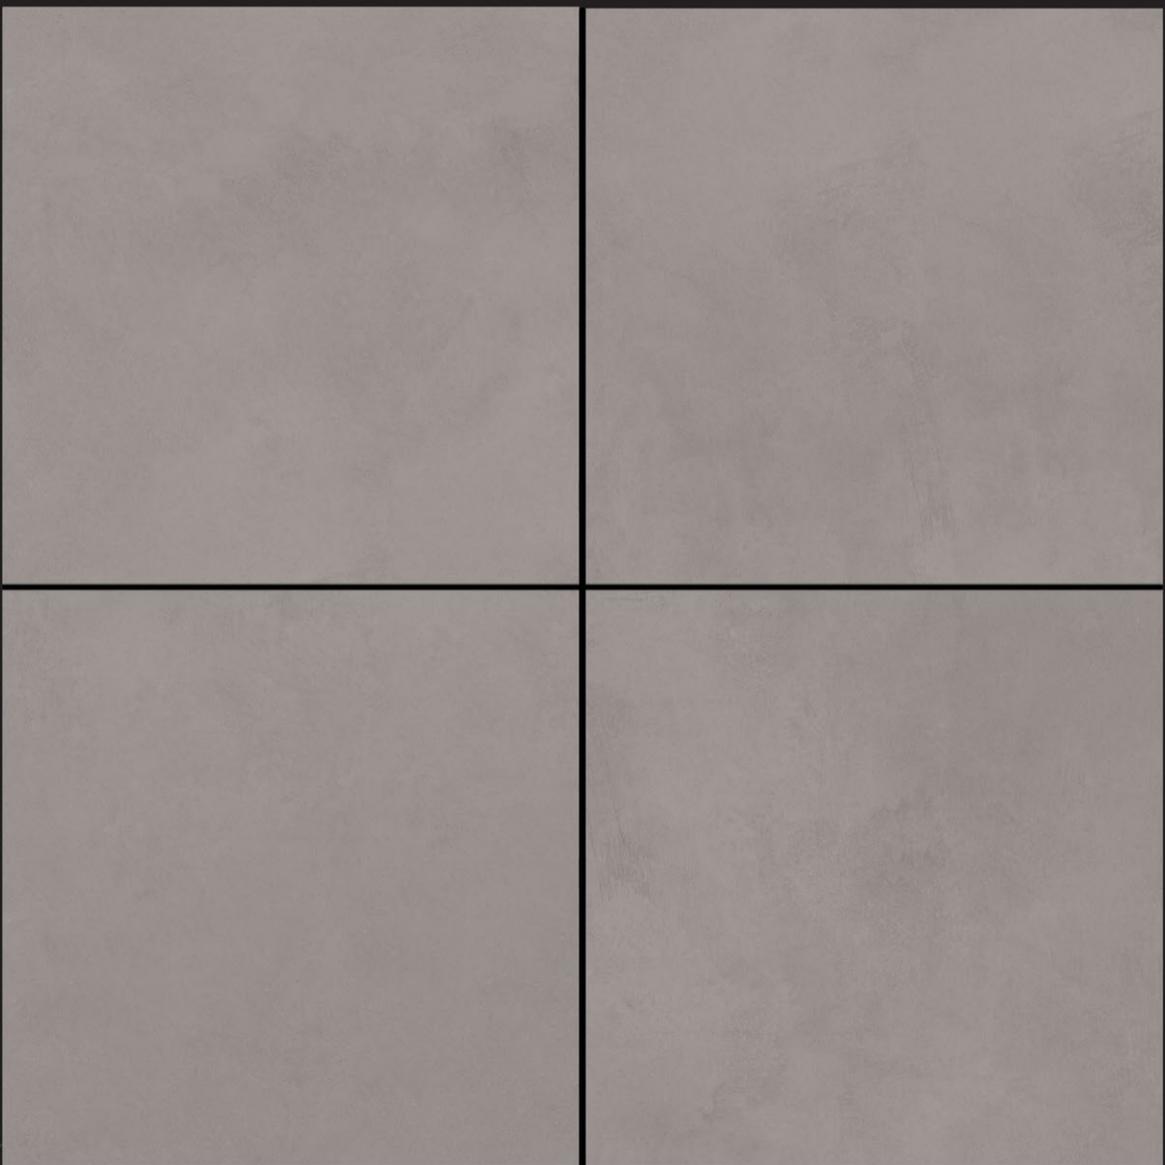


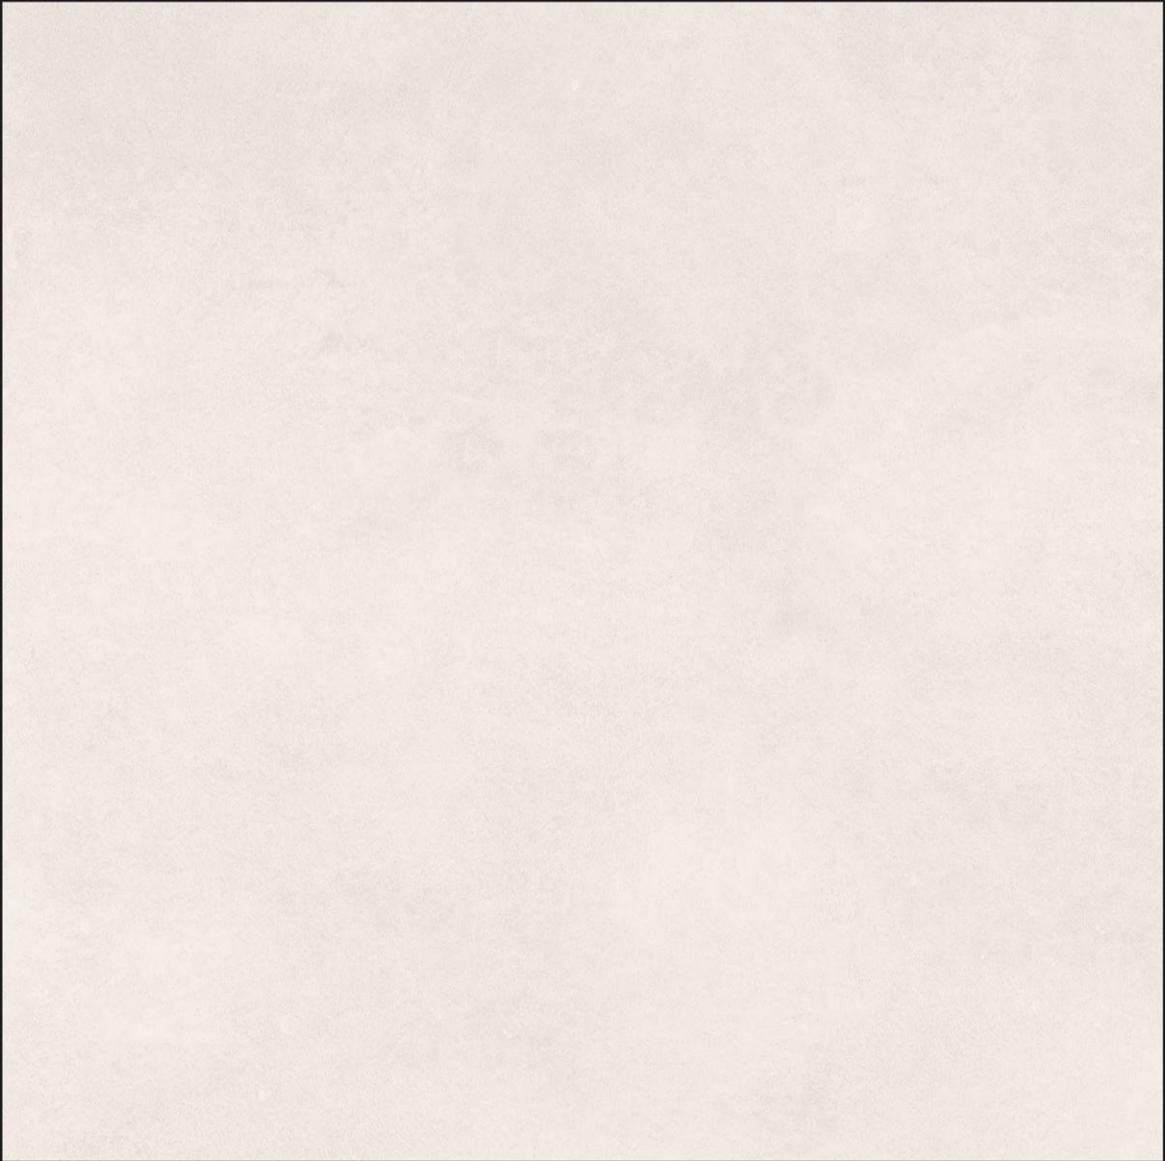

ORVIETO BIANCO


Phase 8

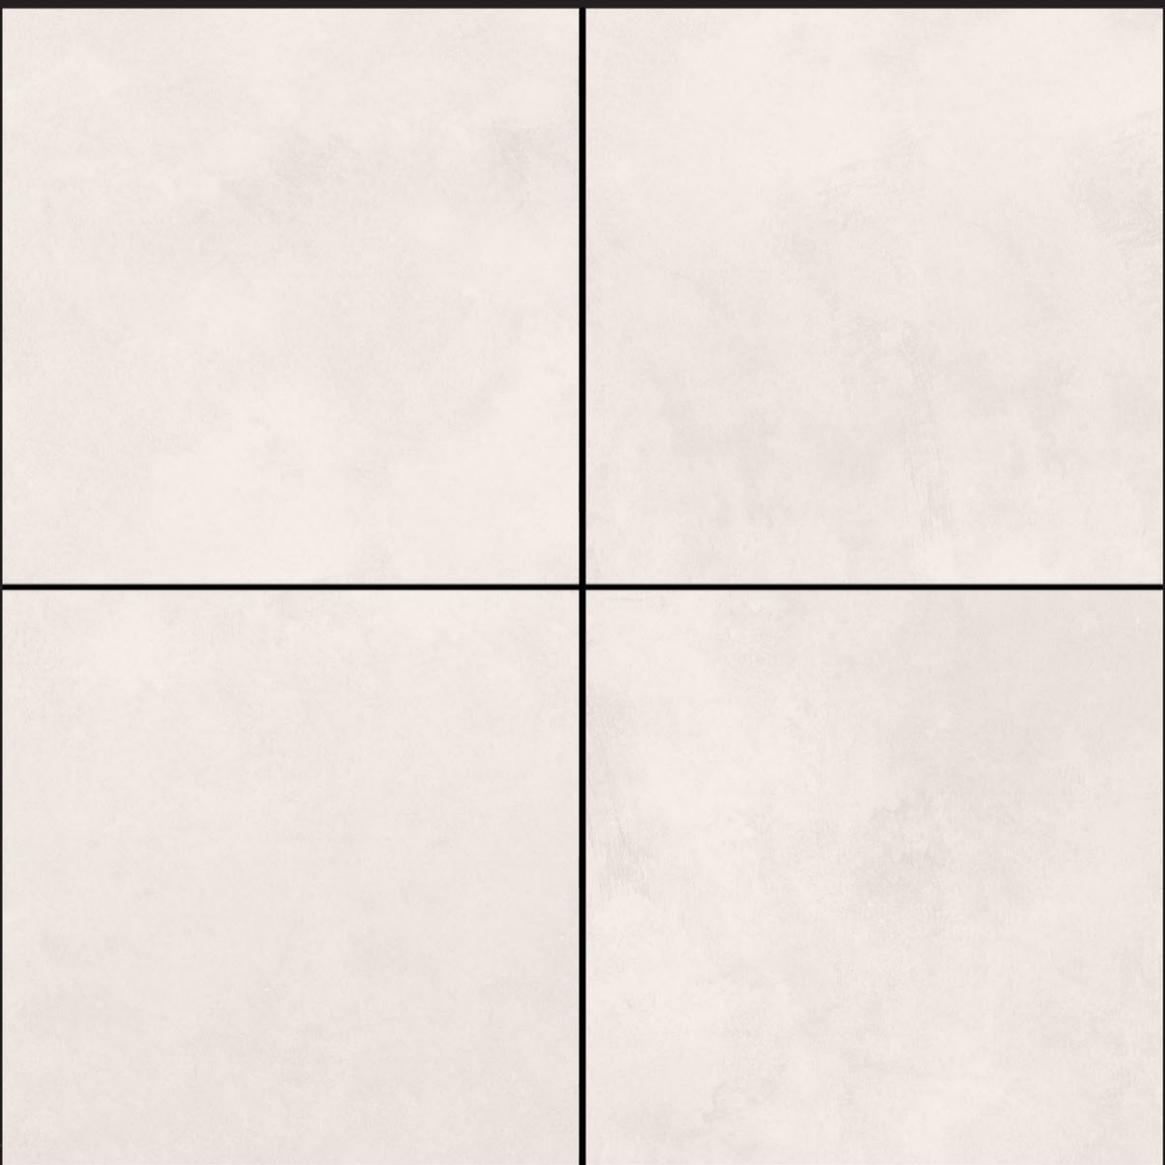

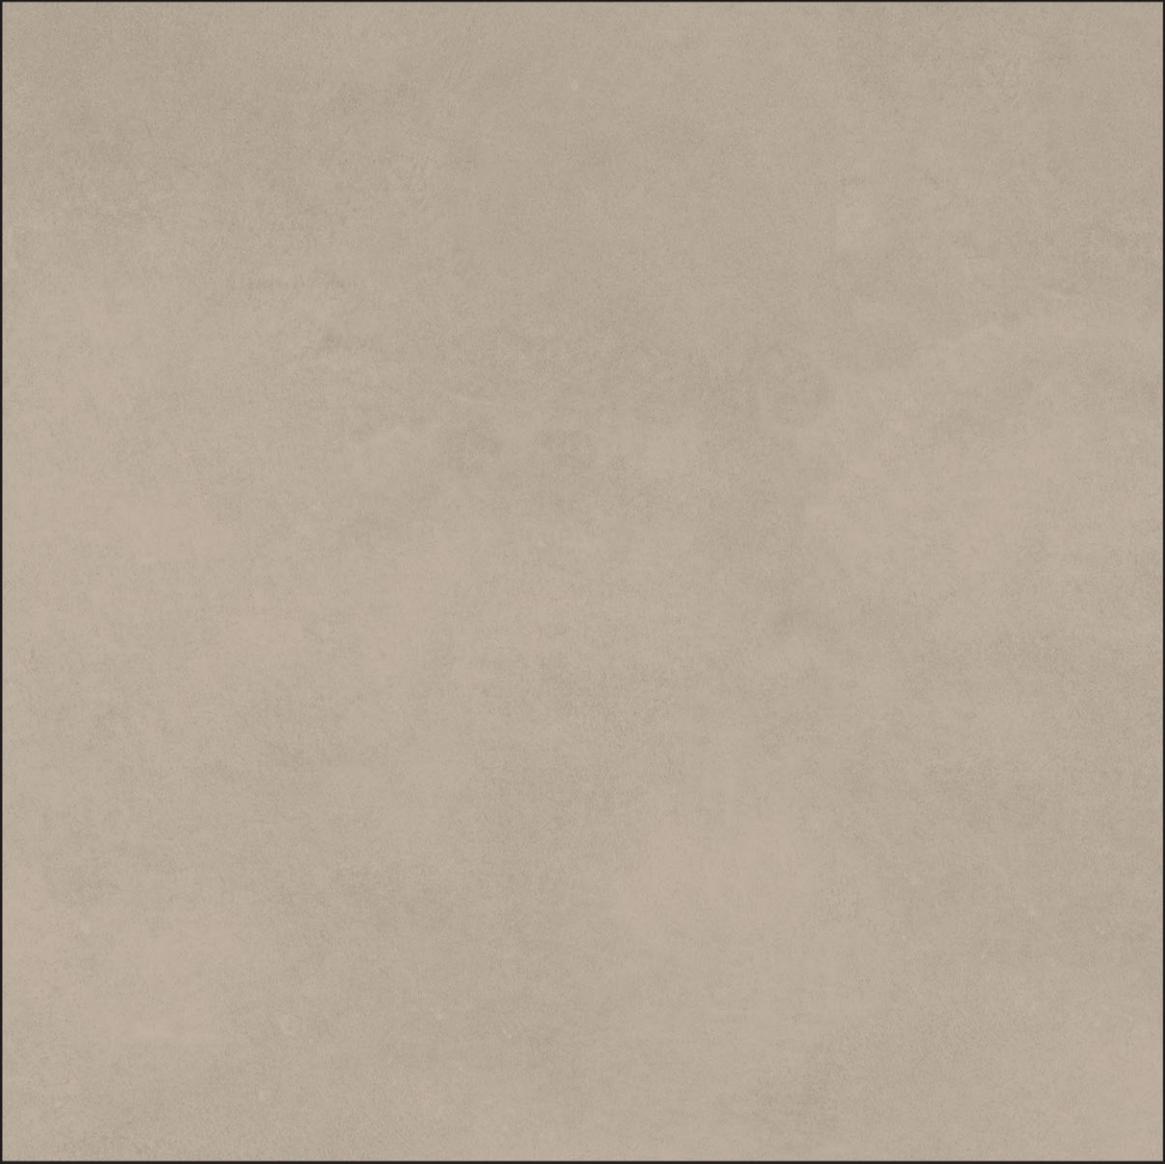

ORVIETO VARDE

Phase 8

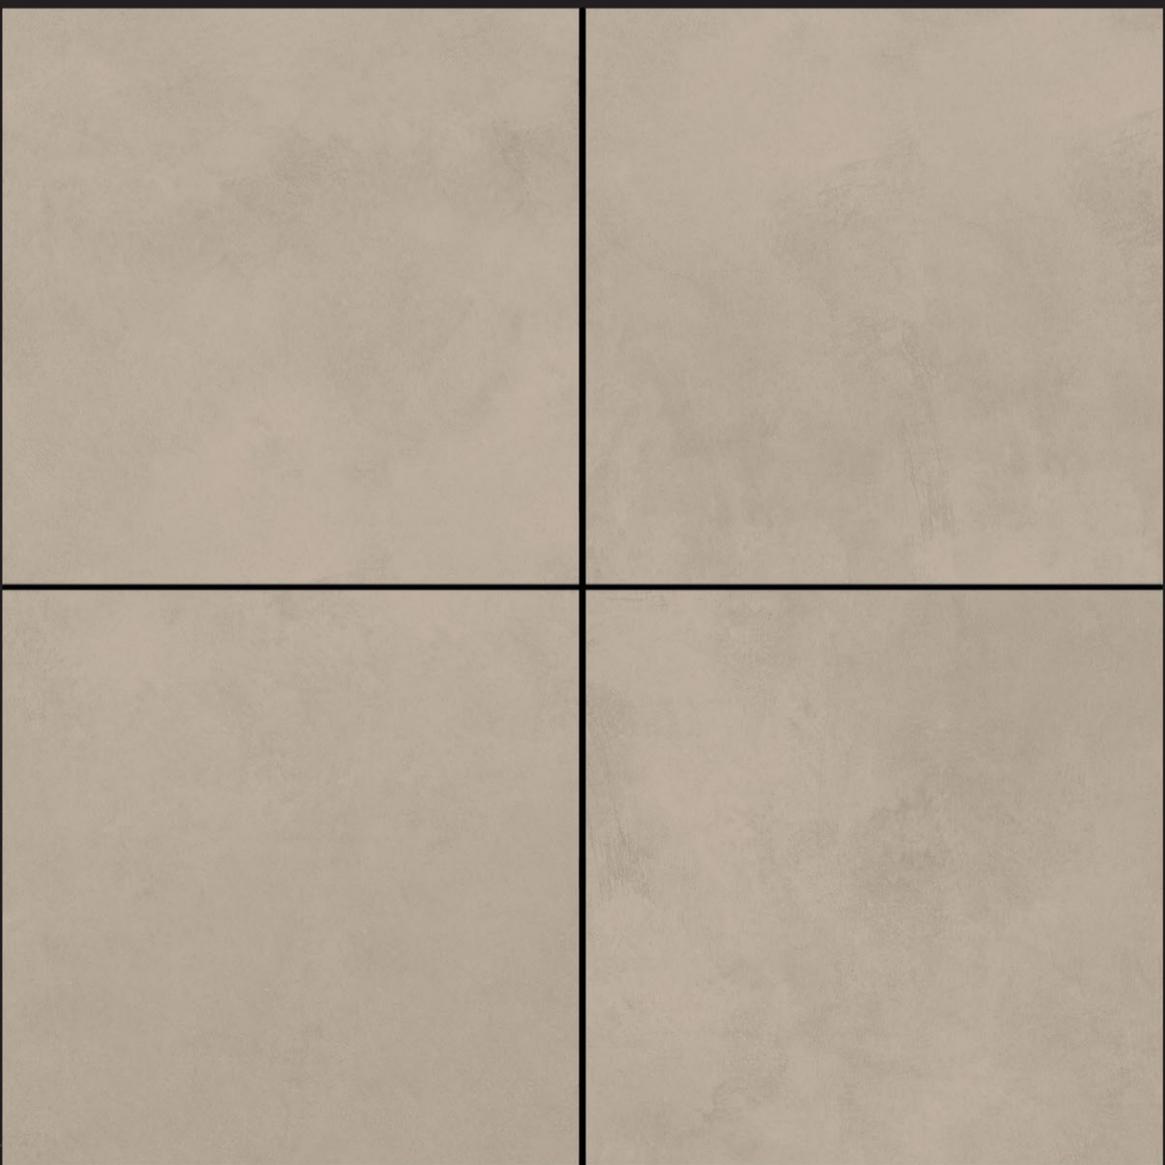



BABUL WOOD


Phase 3






ICE WOOD BROWN


Phase 3

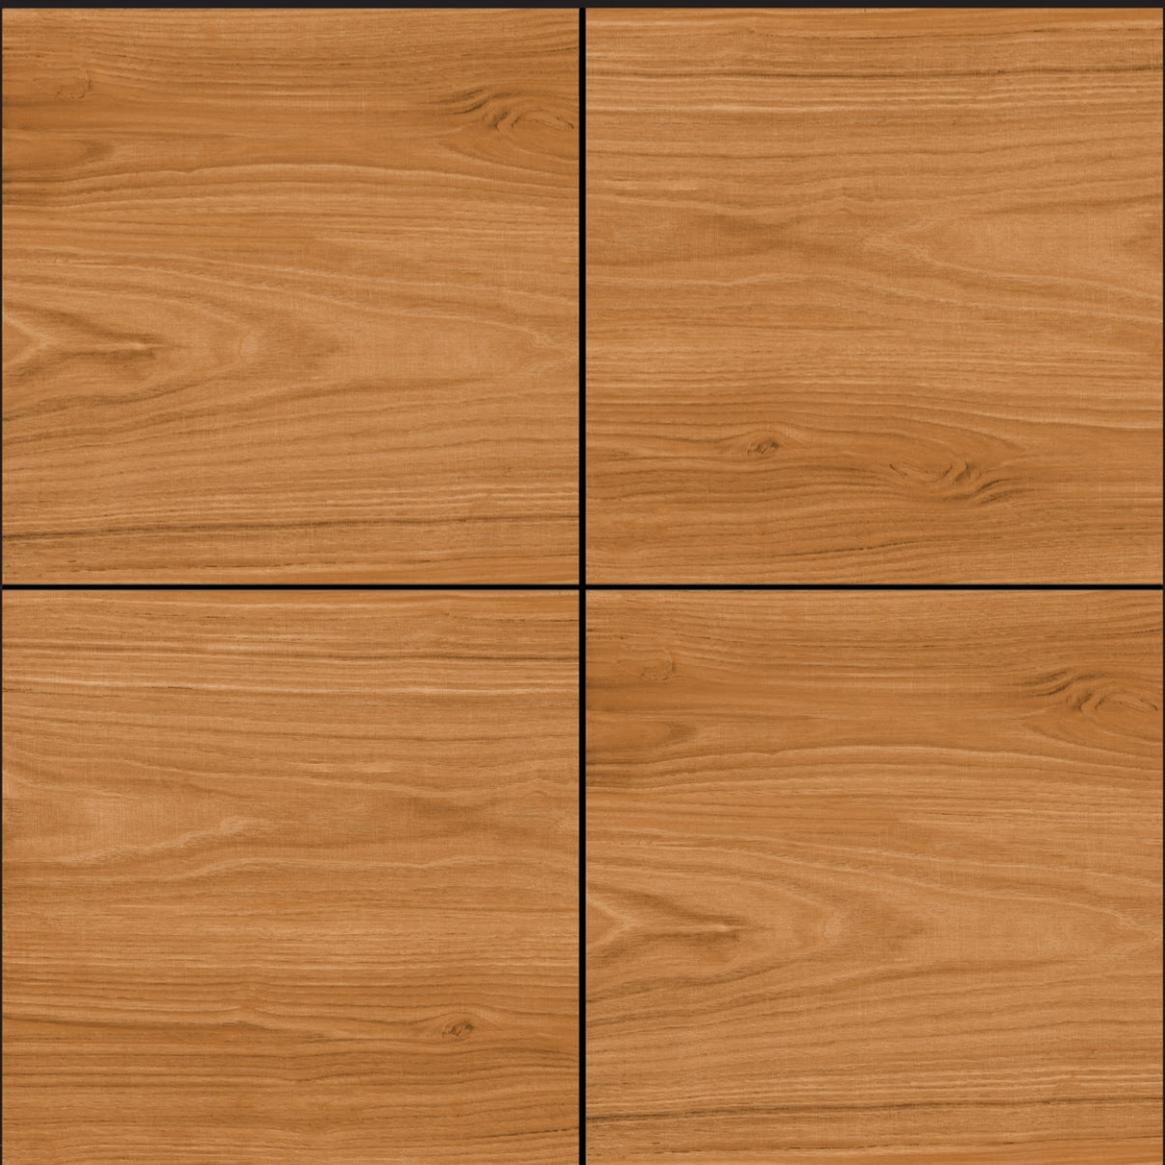

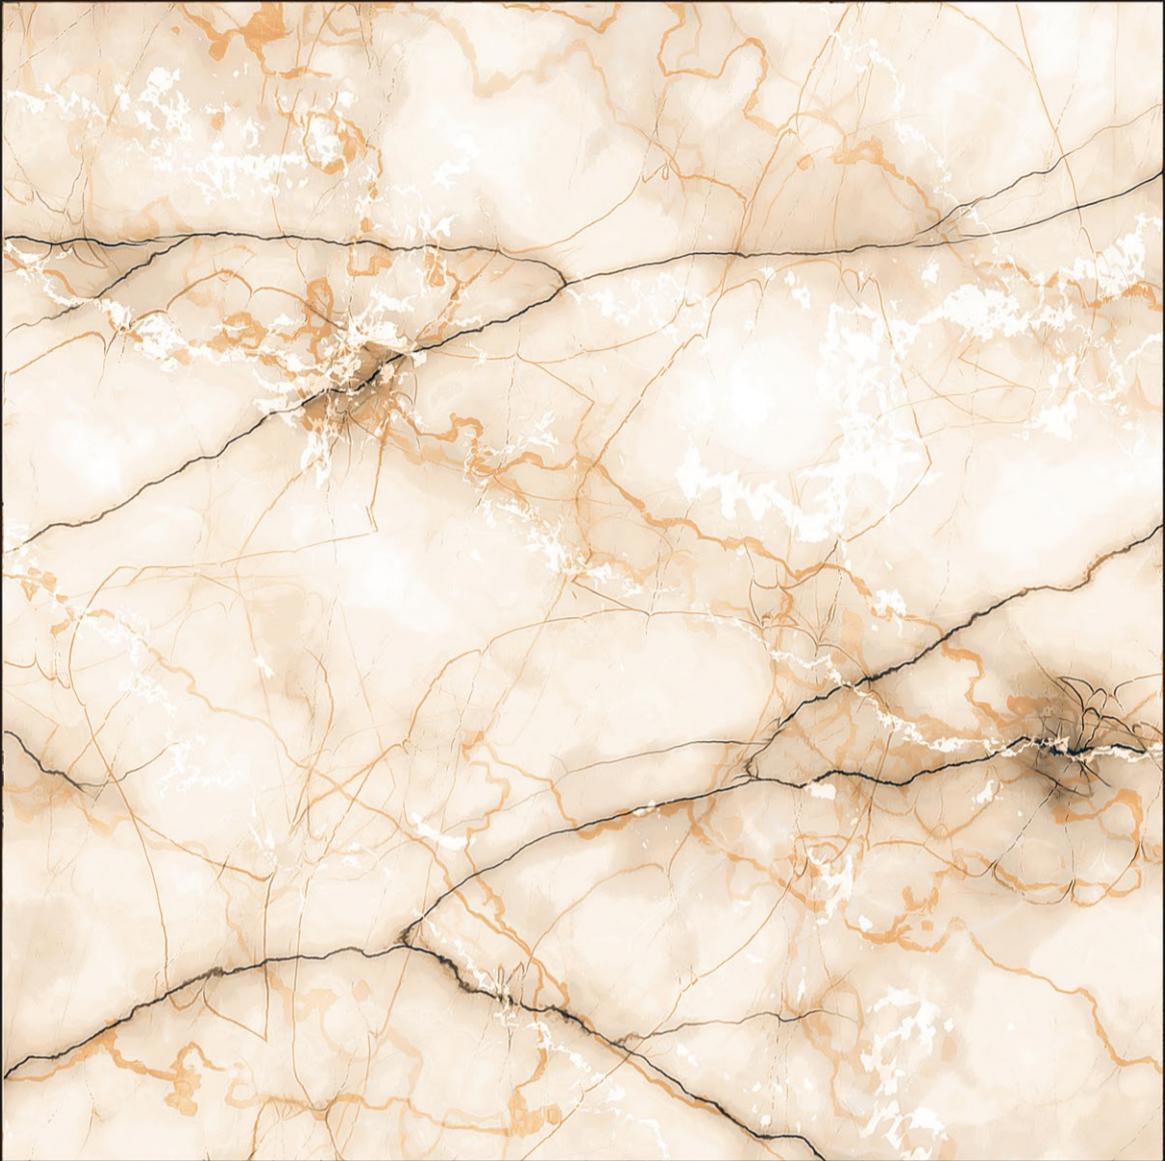

BRAXTONA BRONZE


Phase 1

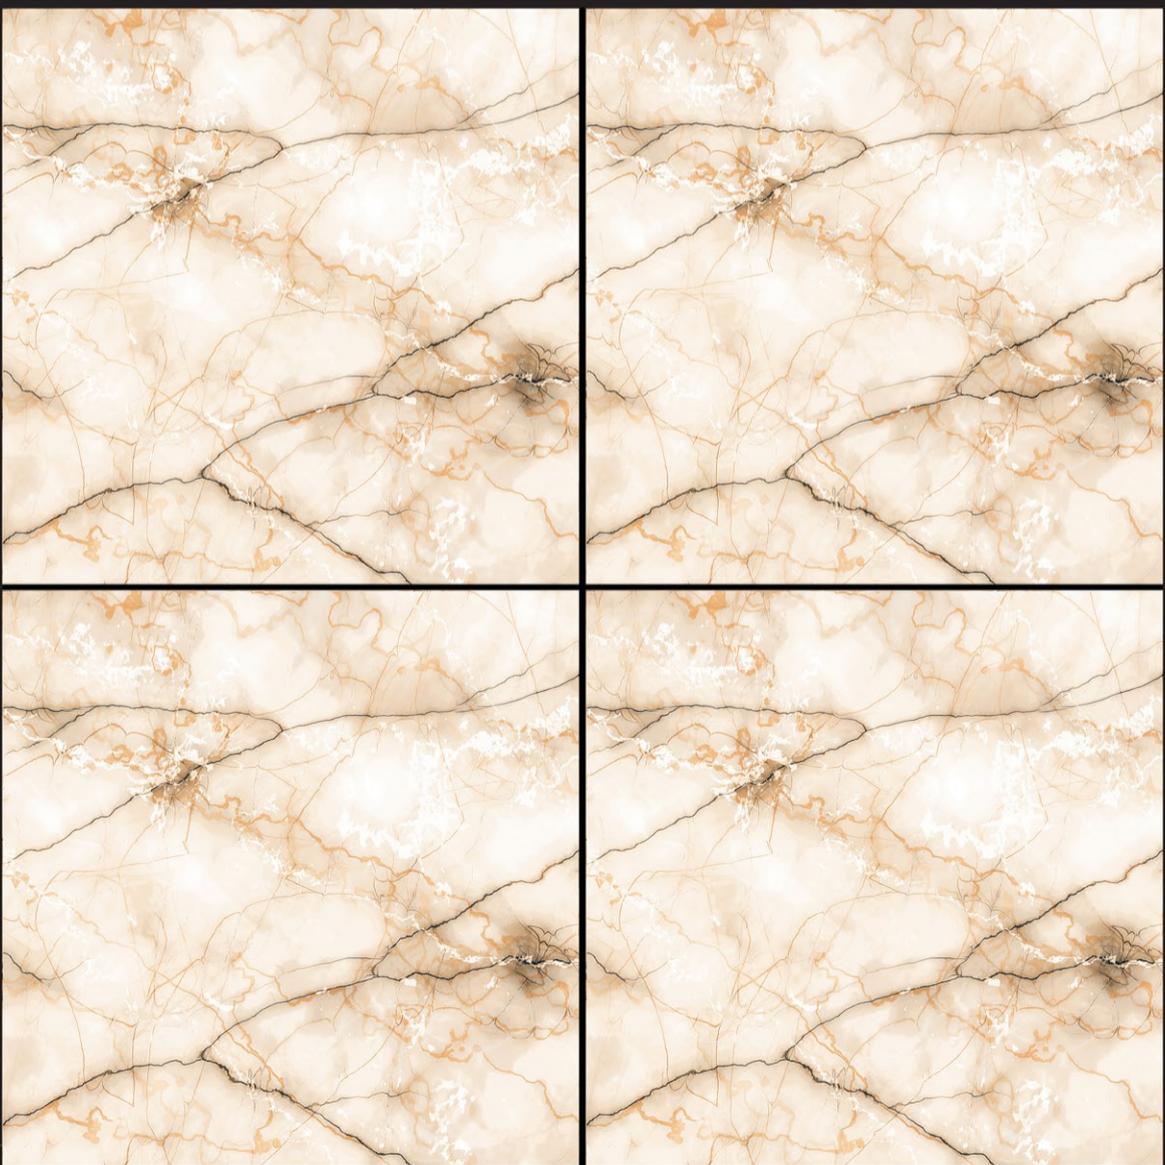



BRAXTONA DENIM

Phase 1

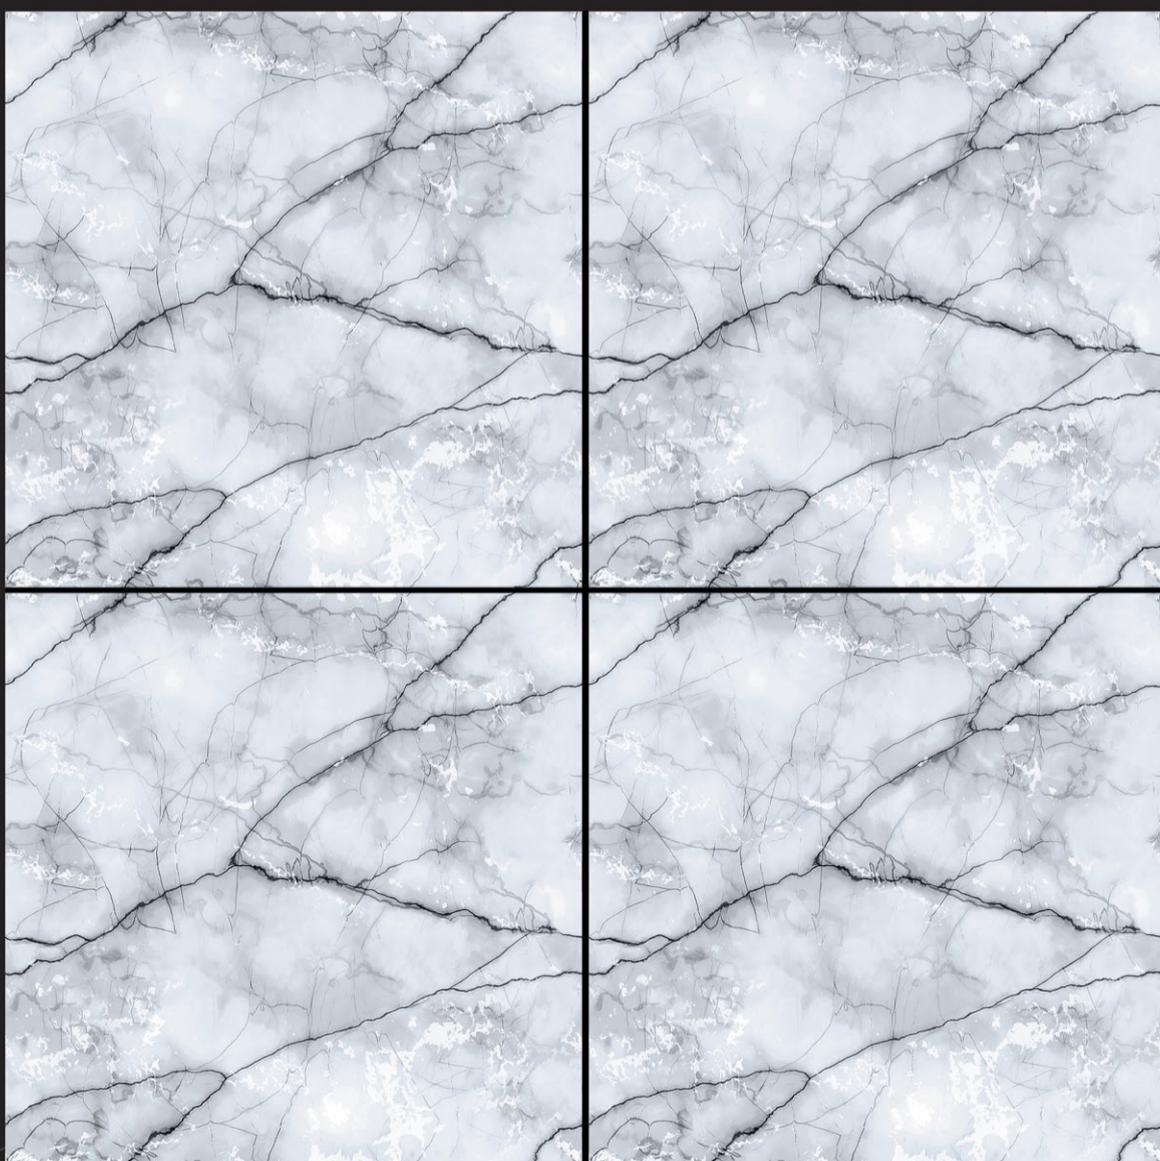



BRAXTONA SILVER

Phase 4





MADRID GRIS


Phase 3






MADRID GREY


Phase 3

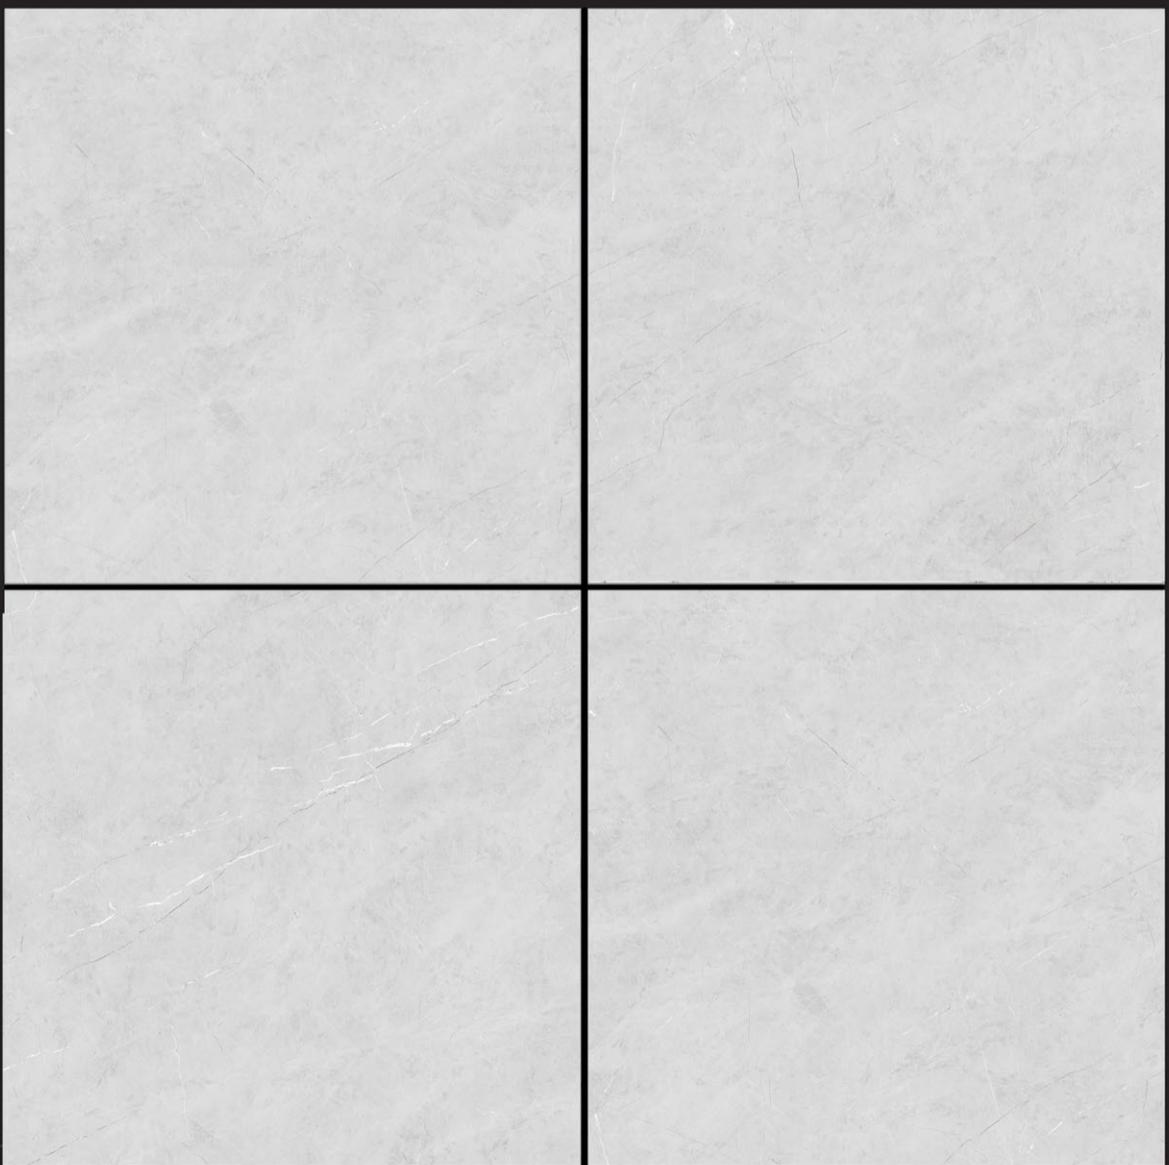

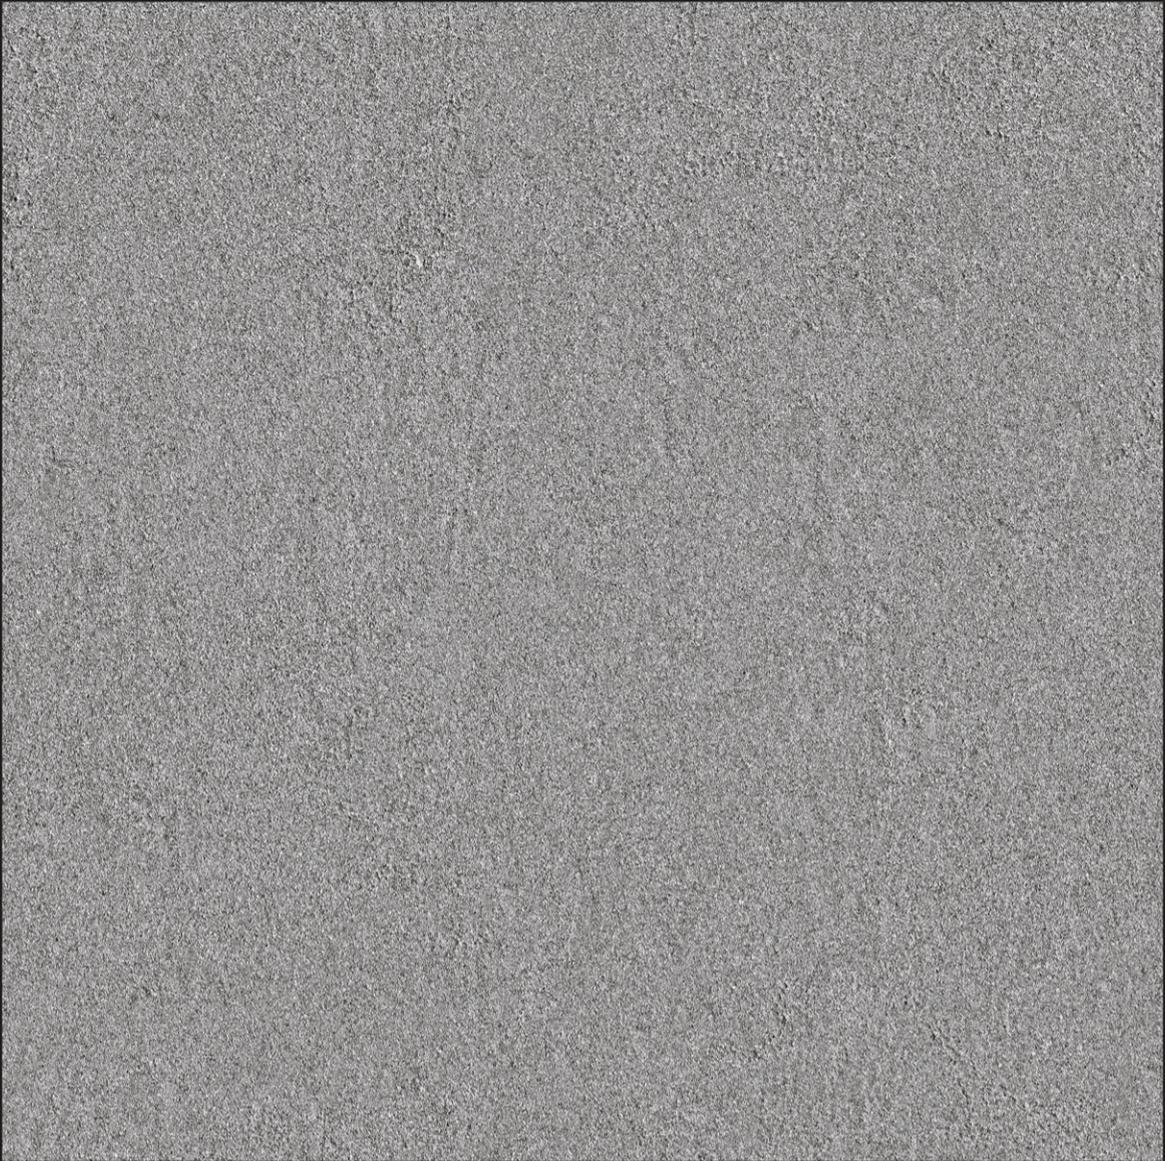

SEASAND GRIS


Phase 1

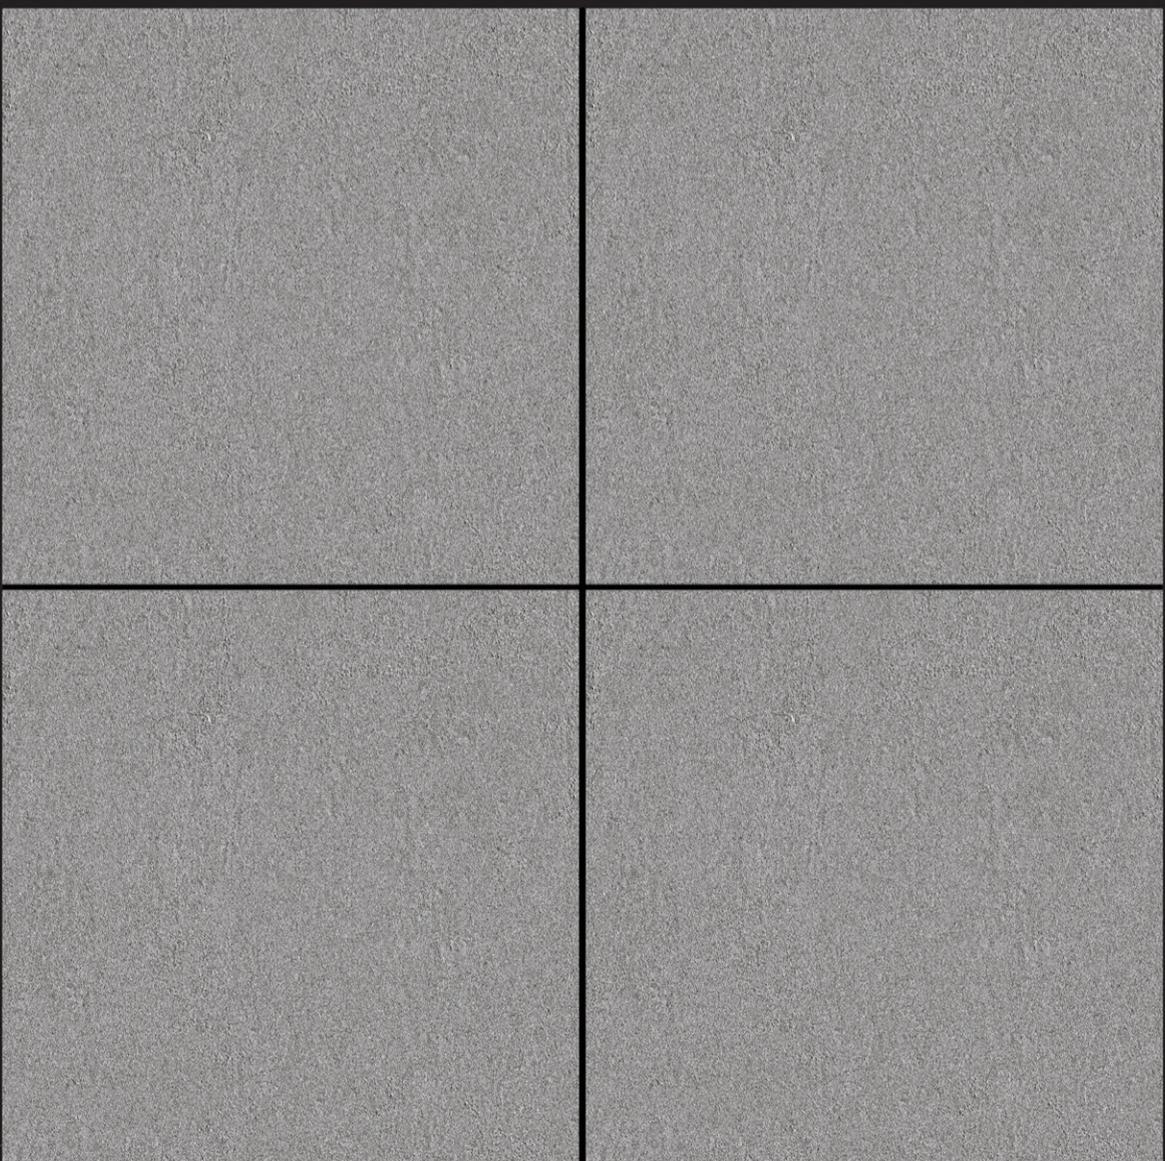



SEASAND GREY


Phase 1

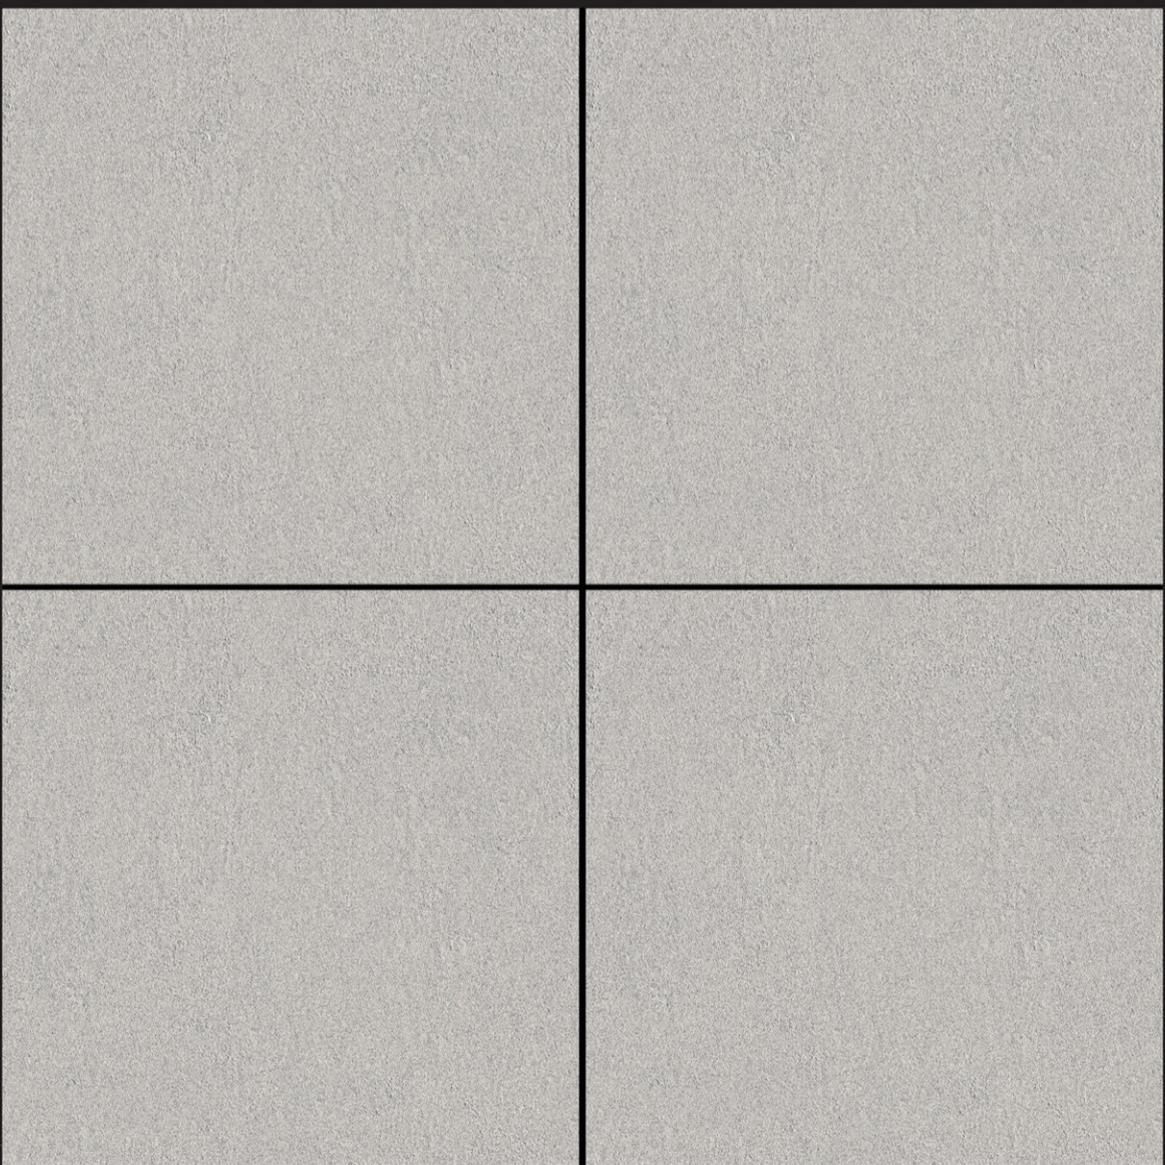



SEASAND CAFE


Phase 1

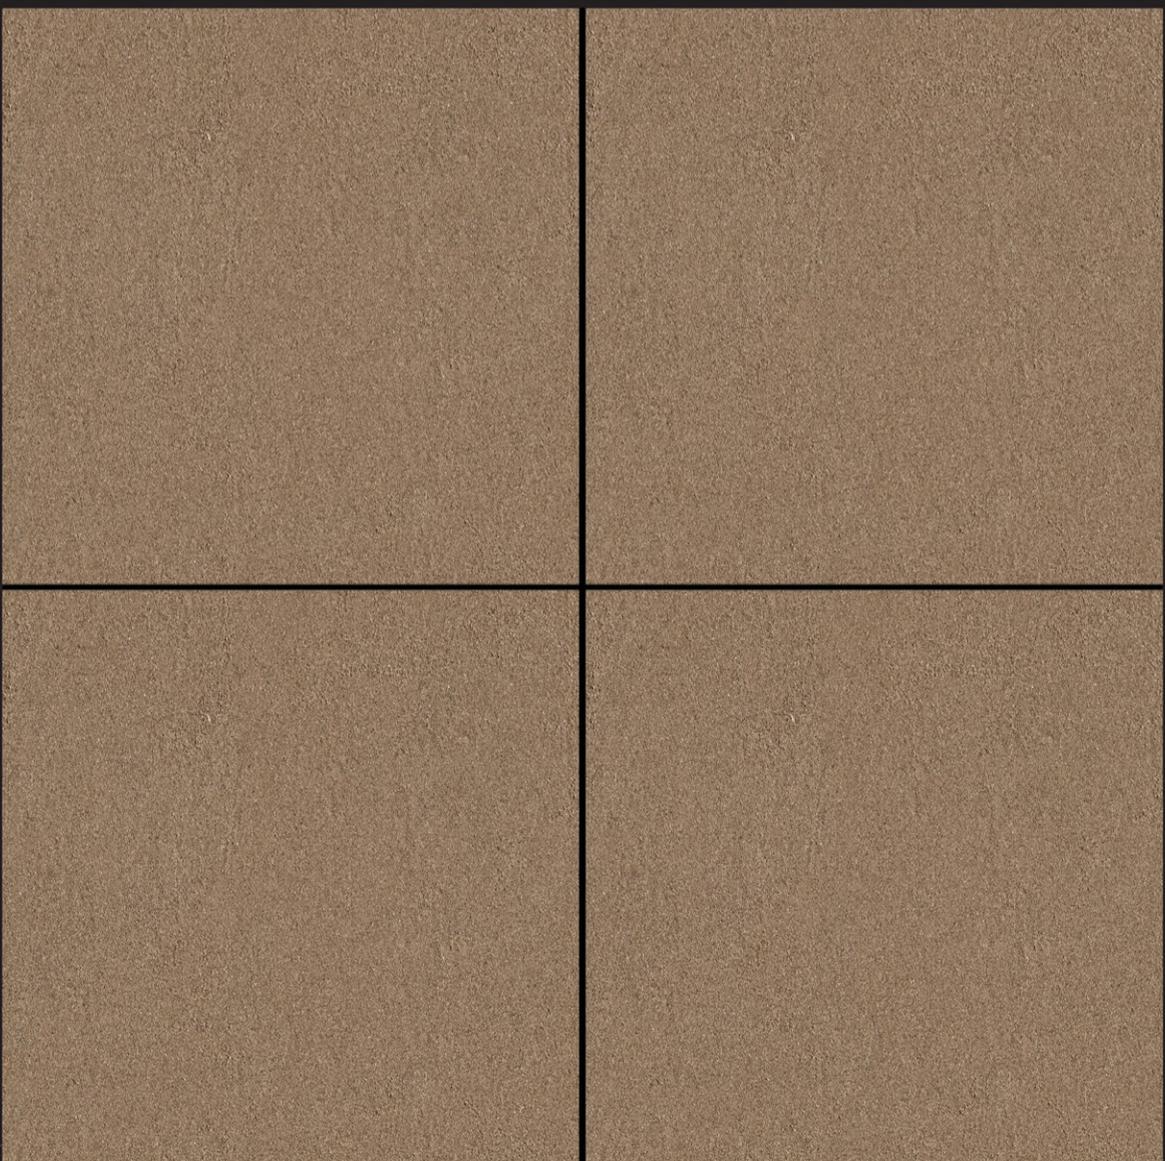




SEASAND CREMA


Phase 1

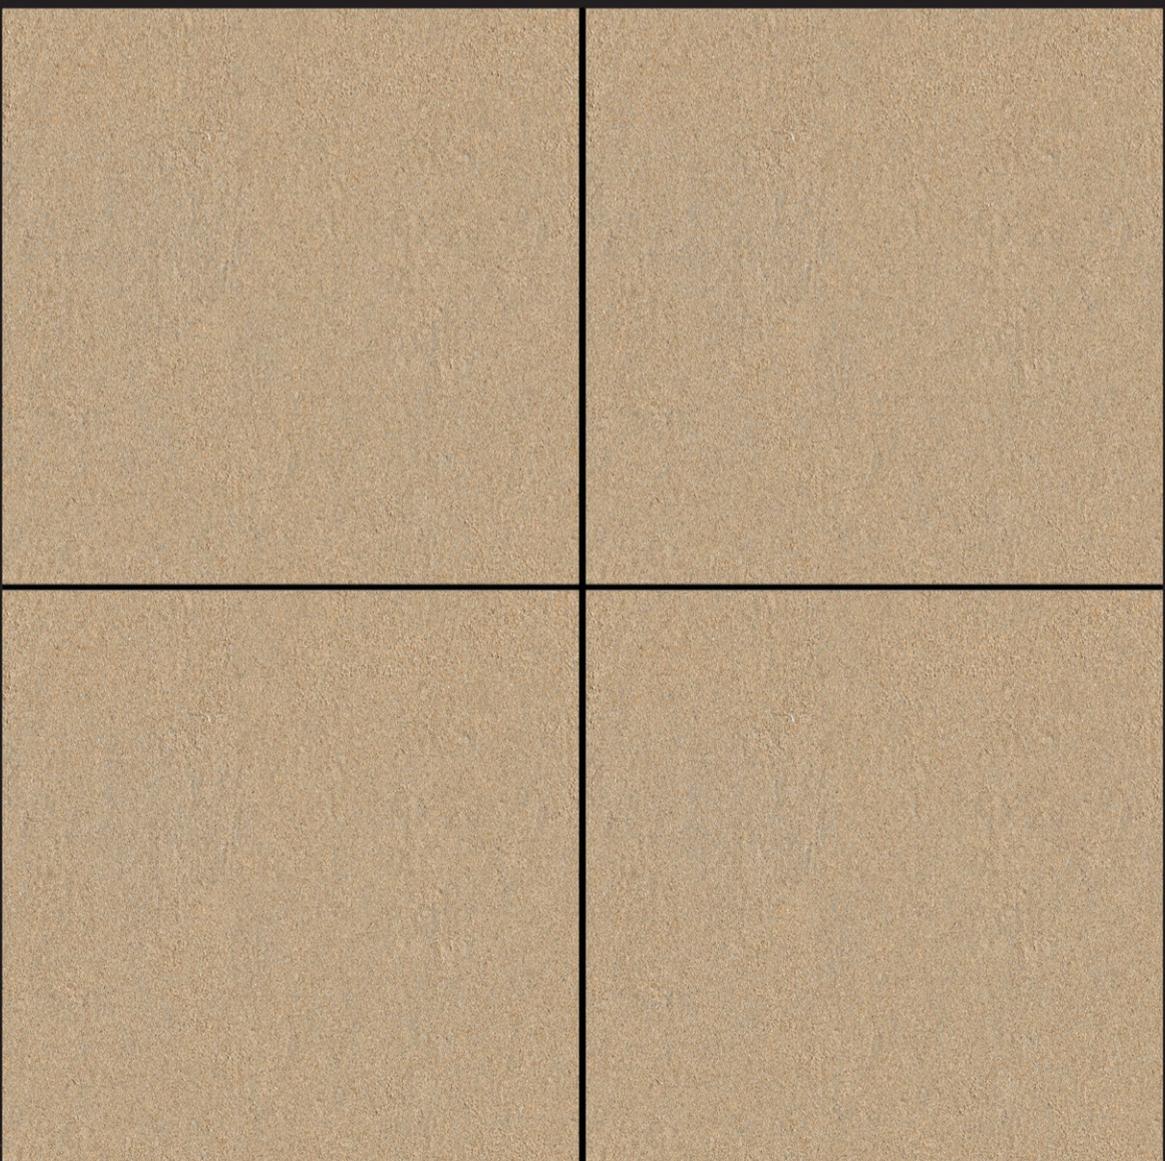

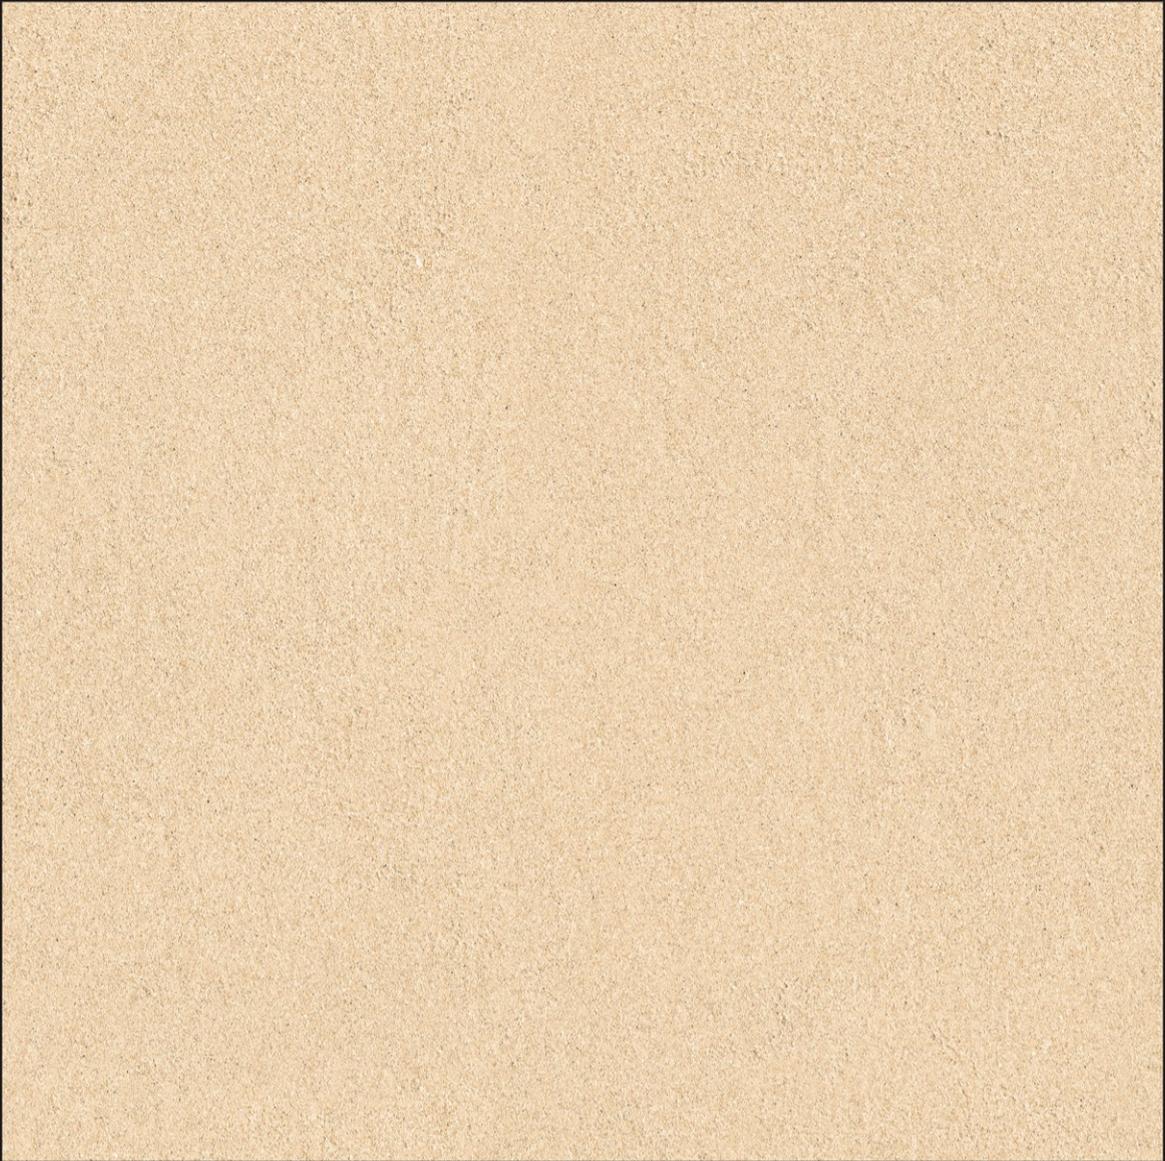

SEASAND IVORY

Phase 1

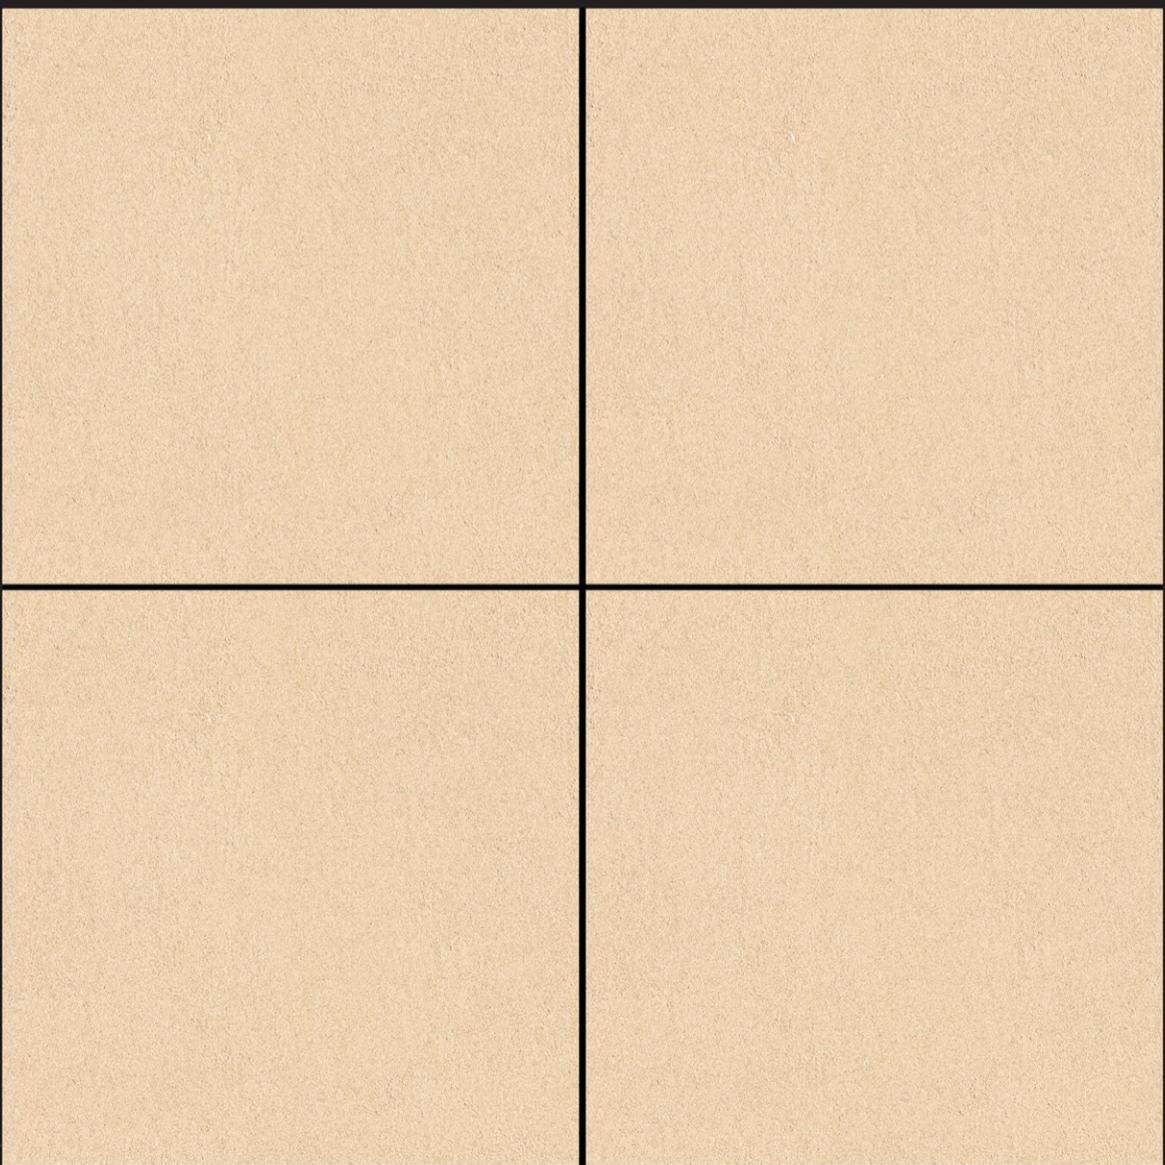

CHARACTERISTIC	STANDARD AS PER ISO-13000/EN14411 DUP BLA	MEAN VALUE OF LEZORA GVT	TEST METHOD
----------------	---	--------------------------	-------------

REGULATORY PROPERTIES			
Deviation in Length & Width	±0.5%	±0.1%	ISO-10545-2
Deviation in Thickness	+5.0%	+4.0%	ISO-10545-2
Straightness in Side	±0.5%	±0.1%	ISO-10545-2
Rectangularity	±0.5%	±0.1%	ISO-10545-2
Surface Flatness	±0.5%	±0.2%	ISO-10545-2
Color Difference	Ungitared	No Change	ISO-10545-16
Glossiness (ONLY FOR PGVT)	As Per Mfg.	Min 90%	GLOSSMETER

STRUCTURAL PROPERTIES			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 20 g/cc	> 2.10 g/cc	DIN 51082

MASSIVE MECHANICAL PROPERTIES			
Modulus of Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-3
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5

SURFACE MECHANICAL PROPERTIES			
Surface Abrasion resistance	As Per Mfg	Min, Class-3	ISO-10545-7
MOH'S Hardness	As Per Mfg	Min. 4	EN 101

THERMO HYGROMETRIC PROPERTIES			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-09
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion (COE)	Max 90 x 10 ⁻⁶	Max 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing Resistance	As Per Mfg	Min. 10 Cycle	ISO-10545-11

CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14

SAFETY PROPERTIES			
Slip Resistance	As Per Mig	> 0,40	ISO-10545-17
Fire Resistance	As Per Mfg	Fireproof	N.A.
Lead & Cadmium Given Off By Glazed Tiles	As Per Mfg.	Does Not Yield Fb & Cd	ISO-10545-15

Packaging Detail

Size	Tickness (approx.)	Tiles Per Box	Coverage Area (approx.)	Wt. Kgs. (approx.)
600x600 MM	8 MM	4 Pcs.	1.44 Sq. Mtr.	26.00



HIGH STRENGTH



CHEMICAL RESISTANCE



STAIN RESISTANT



EASY TO CLEAN



EASY MAINTENANCE



DIMENSIONAL STABILITY




SLIP RESISTANT



ECO FRIENDLY



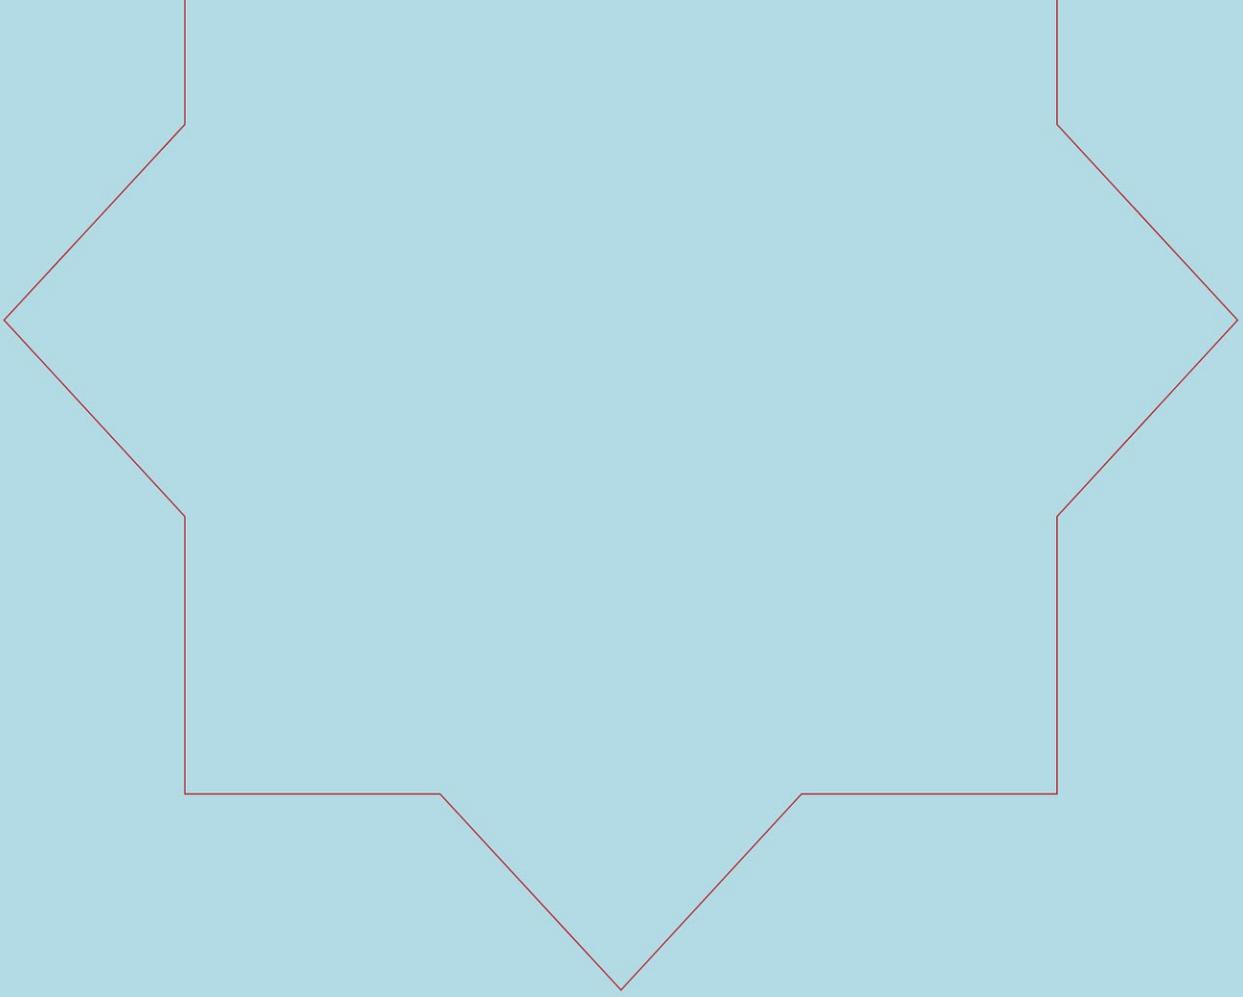

LEZORA
empire of tiles

LEZORA VITRIFIED PVT. LTD.

8-A National Highway, Sartanpar Road,
At.Matel-363621, Morbi (Gujarat) INDIA.

sales@lezoravitrified.com
www.lezoravitrified.com